聯品

商用冷凍產品

REFRIGERATED CATALOGUE

商用不銹鋼雪櫃、雪糕櫃、冷凍櫃、小型冷凍櫃、製冰機、代理品牌雪櫃等

冷凍產品目錄 Contents

超市冷凍／冷藏展示櫃	2	SUPERMARKET DISPLAY CABINET
冷藏展示櫃	12	REFRIGERATED DISPLAY CABINET
卧式冷凍櫃	26	CHEST FREEZER
不銹鋼冷凍／冷藏櫃	30	STAINLESS STEEL FREEZER / REFRIGERATOR
蛋糕展示櫃	45	PASTRY DISPLAY CABINET
訂造廚具產品	49	TAILOR MADE PRODUCTS
製冰機	51	ICE MACHINE
組合式冷房及配件	60	MODULAR COLD ROOM PANELS

意大利進口超市冷凍櫃 Italy Imported Supermarket Freezer
2 ~ 3



韓國進口超市展示櫃 Korea Imported Supermarket Display Cabinet
4 ~ 5



德國進口展示櫃 German Imported Refrigerated Display Cabinet
6



超市展示櫃系列 Supermarket Display Series
7



超市冷凍展示櫃系列 Supermarket Display Freezer Series
8 ~ 11



酒櫃 Wine Cellar
12 ~ 14



立式冷藏展示櫃 Refrigerated Display Cabinet
15 ~ 18



立式風冷冷藏展示櫃 Vertical Ventilated Refrigerated Display Cabinet
19 ~ 21



丹麥進口展示櫃 Denmark Imported Refrigerated Display Cabinet
22



台灣進口冷凍／冷藏展示櫃 Taiwan Imported Refrigerated Display Cabinet
23 ~ 24



日本品牌冷凍／冷藏櫃 Japanese brand Freezer / Refrigerator Display Cabinet
25



卧式冷凍櫃系列 Chest Freezer Series
26 ~27



超低溫卧式冷凍櫃 Ultra-low Temperature Freezer
28



丹麥進口冷凍櫃 Denmark Imported Chest Freezer
29



台灣進口不銹鋼冷凍冷藏櫃／工作台 Taiwan Imported Refriged Stainless Steel Freezer / Refrigerator / Work Table
30 ~ 31



商用不銹鋼冷凍／冷藏櫃／工作台 Commercial Stainless Steel Freezer / Refrigerator / Working Table
32 ~ 37



日本品牌不銹鋼冷凍／冷藏櫃系列 Japanese brand Stainless Steel Freezer / Refrigerator Series
38 ~ 43



進口速凍櫃 Imported Blast Chilling Cabinet
44



蛋糕展示櫃 Pastry Display Cabinet
45 ~ 47



壽司展示櫃 Sushi showcase
48



訂造廚具產品 Tailor Made Products
49 ~ 50



澳意星製冰機 Aoyixing Ice Machine
51 ~ 52



日本品牌製冰機 Japanese Brand Ice Machine
53 ~ 55



意大利品牌製冰機 Italy Brand Ice Machine
56 ~ 58



美國製冰機／碎冰機 Usa Ice Machine / Ice Shaver
59



組合式冷房房板及配件 Modular Cold Room Panels
60



產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.

MONDIALFRAMEC

MADE IN ITALY
意大利製造



HD(拉門)

SD(趟門)

SUPERSUNNY GLASS SD / HD



VENERE

PSB/W | NSB/W | NVB/W



MURALES 7W



MURALES 10W





MURALES W /B/ X ○ (W) 白 WHITE ● (B) 黑 BLACK ● (X) 不鏽鋼 STAINLESS STEEL

意大利 MF 超市展示櫃 Mondial Framec Display Cabinet

型號 Model	尺寸 – 濶 × 深 × 高 Dimensions – W × D × H (mm)	溫度範圍 Temperature range (°C)	功率 Power (w)	有效容量 Validity Capacity (L)	冷凍系統 Cooling System	製冷劑 Refrigerant	其他 Others
SUPERSUNNY GLASS 10	985×737×1987	0 ~ +10	750	601	風冷 Ventilated	R290	(SD) 趟門款及 (HD) 拉門款 (SD)Sliding Door/(HD)Hinged Doors
SUPERSUNNY GLASS 14	1335×737×1987	0 ~ +10	930	825			
SUPERSUNNY GLASS 19	1885×737×1987	0 ~ +10	1200	1180			
VENERE PSB/W	668×773×2000	-2~+10	370	317	風冷 Ventilated	R290	5 塊可拆卸 5 removable shelves
VENERE NSB/W	668×781×2000	-22 ~-15	520	317			6 塊固定 6 fixed shelves
VENERE NVB/W	668×781×2000	-22 ~+5	640	317			5 個可拆卸 +1 個底水箱 5 removable shelves + 1 bottom tank
MURALES 7 W/B/X	685×640×1981	+2 ~ +4	700	318	風冷 Ventilated	R507/ R290	4 塊層板 4 shelves
MURALES 10 W/B/X	985×640 ×1981	+2 ~ +4	800	447			
MURALES 14 W/B/X	1335×640 ×1981	+2 ~ +4	920	663			
MURALES 19 W/B/X	1885×640 ×1981	+2 ~ +4	1250	954			

⚠ 請避免陽光直射和遠離熱源，環境溫度不能高於 28° C，或有可能影響製冷效果。
Please avoid direct sunlight and heat sources. The ambient temperature cannot be higher than 28° C, which may affect the cooling effect.

⚠ 靠背請留有空間散熱。
Allow space behind the machine.

產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.

MONDIALFRAMEC

MADE IN ITALY
意大利製造

零下 25°C
持續低溫，適合存放雪糕、蛋糕



EXPO430NV



MIRABELLA H6G



MIRABELLA H7G



MIRABELLA H9G



TOP7



TOP 6



BRIO ICE 4 SK



DOLCE VITA NEW 10



DOLCE VITA NEW 8



DOLCE VITA NEW 6



DOLCE VITA NEW 4



防震玻璃擋板
SHOCK-PROOF PLEXIGLASS SNEEZE SCREEN

意大利 MF 雪糕冷凍櫃 Mondial Framec Ice-cream Freezer

型號 Model	尺寸－濶 × 深 × 高 Dimensions – W × D × H (mm)	温度範圍 Temperature range (°C)	功率 Power (w)	有效容量 Validity Capacity (L)	冷凍系統 Cooling System	製冷劑 Refrigerant	其他 Others
EXPO 430 NV	668×692×1990	-25 ~ -15	745	260	風冷 Ventilated	R290	5 塊層板，除霧玻璃 5 shelves, Defrost glasses
Mirabella H6G	1190×677×1190	-20 ~ -5	742	184	直冷 Static	R290	除霧玻璃 Defrost glasses
Mirabella H7G	1340×677×1190		744	223			
Mirabella H9G	1655×677×1190		890	306			
BRIO ICE 4 SK	780×640×1181	-25 ~ -18	150	136	直冷 Static	R134a/R600a	除霧玻璃 Defrost glasses
TOP 6	1200×673×1175	-20 ~ -15	330	210	直冷 Static	R507/R290	除霧玻璃 Defrost glasses
TOP 7	1350×673×1175		500	238			
DOLCE VITA NEW 4	654×665×1030	-20 ~ -5	260	130	直冷 Static	R290	4 個旋轉輪 4 pivoting wheels
DOLCE VITA NEW 6	965×665×1030		310	220			
DOLCE VITA NEW 8	1105×713×1030		350	245			
DOLCE VITA NEW 10	1435×713×1030		480	355			

＊ 雪櫃內外溫差有機會造成玻璃門上水霧，純屬正常。
Temperature difference between ex/internal of the refrigerator may cause moisture on glass door(s), and this is normal.

⚠ 請避免陽光直射和遠離熱源，環境溫度不能高於 28° C，或有可能影響製冷效果。
Please avoid direct sunlight and heat sources. The ambient temperature cannot be higher than 28° C, which may affect the cooling effect.

產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.


■ 4 面玻璃，提升展示效果
4 Glass Surfaces for improved Display Effect

■ 附有旋轉車輪，方便移動
Rotating Wheels attached for Greater Portability



韓國 ARNEG 開放式風冷島櫃 ARNEG Open Type Island Freezer

型號 Model	尺寸 – 濶 × 深 × 高 Dimensions – W × D × H (mm)	溫度範圍 Temperature range (°C)	功率 Power (w)	有效容量 Validity Capacity (L)	冷凍系統 Cooling System	製冷劑 Refrigerant
LAVAL 1000	1000×1050×900	-20 ~ -18 / -2 ~+2	750	114	風冷 Ventilated	R404a
LAVAL 1300	1370×1050×900	-20 ~ -18 / -2 ~+2	1450	165	風冷 Ventilated	R404a
LAVAL 2000	1970×1050×900	-20 ~ -18 / -2 ~+2	1550	247	風冷 Ventilated	R404a

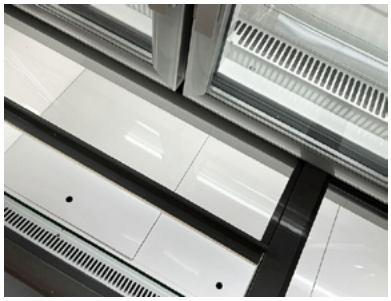



韓國 ARNEG 超市子母展示櫃 ARNEG Display Cabinet

型號 Model		IMUS1100 雙機頭 (雙門)	IMUS1500 雙機頭 (三門)
尺寸 – 濶 × 深 × 高 Dimensions – W × D × H	(mm)	1139×835×1830	1565×835×1830
有效容量 Validity Capacity	(L)	323	479
溫度範圍 Temperature range	(°C)	-20 ~ -18	-20 ~ -18
功率 Power	(w)	1850	2050
冷凍系統 Cooling System		風冷 Ventilated	風冷 Ventilated
制冷劑 Refrigerant		R404a	R404a
其他 Others		8 塊層板，8 個籃 8 shelves, 8 basket	12 塊層板，12 個籃 12 shelves, 12 basket



IMUS 1100
IMSU 1500

⚠ 請避免陽光直射和遠離熱源，環境溫度不能高於 28° C，或有可能影響製冷效果。
Please avoid direct sunlight and heat sources. The ambient temperature cannot be higher than 28° C, which may affect the cooling effect.

產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.

KOREA IMPORTED 韓國進口



JINJU



KIMPO4



COLOMBO HD (CHD)



DOKDO
可選擇冷熱互換款式
Optional Temperature range



HONGDO

韓國 ARNEG 超市展示櫃 ARNEG Display Cabinet

型號 Model	尺寸－濶 × 深 × 高 Dimensions – W × D × H (mm)	溫度範圍 Temperature range (°C)	功率 Power (w)	有效容量 Validity Capacity (L)	制冷劑 Refrigerant
JINJU 1200	1330×1190×1175	-2 ~ +2	900	196	R404A
JINJU 1800	1955×1190×1175	-2 ~ +2	1485	294	R404A
KIMPO 900	900×580×1400	+3 ~ +10	1375	172	R404A
KIMPO 1200	1200×580×1400	+3 ~ +10	1430	228	R404A
CHD 900	900×760×1960	+2 ~ +8	1510	295	R404A
CHD 1200	1200×760×1960	+2 ~ +8	1510	403	R404A
CHD 1500	1500×760×1960	+2 ~ +8	1750	511	R404A
CHD 1800	1800×760×1960	+2 ~ +8	1750	619	R404A
DOKDO 900	965×655×1960	+5~ +10 (冷款) +40 ~ +50 (熱款)	1550		R404A
DOKDO 1200	1270×655×1960		1600		R404A
HONGDO 1300	1300×770×2000	+2 ~ +8	1180	411	R404A
HONGDO 1900	1925×770×2000	+2 ~ +8	1570	617	R404A
HONGDO 2500	2550×770×2000	+2 ~ +8	2100	1107	R404A

⚠ 請避免陽光直射和遠離熱源，環境溫度不能高於 28° C，或有可能影響製冷效果。
Please avoid direct sunlight and heat sources. The ambient temperature cannot be higher than 28° C, which may affect the cooling effect.

產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.

German Engineering

- 強制冷卻 Forced air cooling
- 溫度警告裝置 Temperature alarm
- 高效冷藏 Efficient refrigeration system
- 環保製冷劑 Environmentally friendly refrigerants
- 調高式腳座 Height-adjustable feet
- LED 內部節能照明 The energy-saving LED interior lighting



FV 3643



FDV 4643

德國 LIEBHERR 展示櫃 LIEBHERR Display Cabinet

型號 Model	尺寸－濶 × 深 × 高 Dimensions – W × D × H (mm)	溫度範圍 Temperature range (°C)	有效容量 Validity Capacity (L)	功率 Power (w)	電壓 Voltage	冷凍系統 Cooling System	制冷劑 Refrigerant
Fv 3643	690×780×1659	-25 ~ -10	231	968	220V/ 50Hz/ 1ph, 4.4A	風冷 Forced air	R290
FDv 4643	670×721×1999	-25 ~ -10	307	968			

德國進口展示櫃 GERMAN IMPORTED REFRIGERATED DISPLAY CABINET

- 掛籃配件 Suspension baskets
- 鋼化單窗玻璃安全玻璃 Tempered single-pane safety glass
- 高效冷藏 Efficient refrigeration system
- 滑動式玻璃蓋 Sliding glass lids
- 環保製冷劑 Environmentally friendly refrigerants
- LED 內部節能照明 The energy-saving LED interior lighting



EFE 1152



EFI 2153



EFI 2583

斜面設計 Beveled design



EFI 4453



EFI 5653

德國 LIEBHERR 卧式玻璃趟門櫃 LIEBHERR Curved Glass Lids Chest Freezers

型號 Model	尺寸－濶 × 深 × 高 Dimensions – W × D × H (mm)	溫度範圍 Temperature range (°C)	有效容量 Validity Capacity (L)	功率 Power (w)	電壓 Voltage	冷凍系統 Cooling System	製冷劑 Refrigerant
EFE1152	751×481×825	-24 ~ -10	84	330	220V/ 50Hz/ 1ph, 1.5A	直冷 Static	R600a
EFI 2153	835×680×825	-24 ~ -10	210	330	220V/ 50Hz/ 1ph, 1.5A	直冷 Static	R290
EFI 2853	1045×680×825		282				
EFI 4453	1465×660×825	-24 ~ -10	426	550	220V/ 50Hz/ 1ph, 2.5A	直冷 Static	R290
EFI 5653	1885×660×825		571				

⚠ 靠背請留有空間散熱。 Allow space behind the machine.

＊ 關燈時測量 Measured with lighting switched off

＊ 雪櫃內外溫差有機會造成玻璃門上水霧，純屬正常。 Temperature difference between ex/internal of the refrigerator may cause moisture on glass door(s), and this is normal.

產品不斷改良，如有更改，均以實物為準。 Products are subject to change due to enhancements and continuous development.

■ 冷凍系統：
上風冷，下直冷
Cooling System：
Ventilated(Upper),
Static(Lower)


UP-1200


UP-1500


UP-2100

超市子母櫃 Supermarket display Combined

型號 Model	尺寸－濶 × 深 × 高 Dimensions－W ×D×H (mm)	溫度範圍 Temperature range (°C)	功率 Power (w)	上下層容量 Capacity (L)	冷凍模式 Cooling Mode	製冷劑 *1 Refrigerant	其他 Others
UP-1200	1275× 680 × 2060	+2～+8（冷藏） -18～0（冷凍）	615	605 (250＋355)	上冷藏下冷凍 / 上冷凍下冷藏 / 上下冷藏 / 上下冷凍	R290	壓縮機 ×2 上櫃冷凍可自動融霜
UP-1500	1505 × 895 × 2100		859	1205 (595＋610)		R290 / R404a	壓縮機 ×2 上櫃冷凍可自動融霜
UP-2100	2105×955×2123		1415	1660 (1200＋460)		R290 / R404a	壓縮機 ×3 上下冷凍自動融霜


SL-DLCD15PF


ASCP-200-CT

超市鮮肉櫃 Meat Display Refrigerator

型號 Model	尺寸－濶 × 深 × 高 Dimensions－W ×D×H (mm)	溫度範圍 Temperature range (°C)	功率 Power (w)	有效容量 Validity Capacity (L)	冷凍系統 Cooling System	製冷劑 *1 Refrigerant
SL-DLCD15PF	1500×1170×945	+2～+8	830	150	風冷 Ventilated	R22 / R290
SL-DLCD20PF	2000×1170×945	+2～+8	850	200	風冷 Ventilated	R22 / R290
SL-DLCD25PF	2500×1170×945	+2～+8	1370	250	風冷 Ventilated	R22 / R290
ASCP-200-CT	1875×1150×1200	-3～+5	1087	432	風冷 Ventilated	R134a / R290

A052G100LZ
A052G120LZ
A052G200LZ
A052G250LZ




白色款

開放式展示櫃 Open Display Cabinet

型號 Model	尺寸－濶 × 深 × 高 Dimensions－W ×D×H (mm)	溫度範圍 Temperature range (°C)	功率 Power (w)	冷凍系統 Cooling System	製冷劑 Refrigerant
A052G100LZ	965×760×2000	+2~ +8	980	風冷 Ventilated	R290
A052G120LZ	1270×760×2000	+2~ +8	1,250		
A052G200LZ	1880×760×2000	+2~ +8	1,650		
A052G250LZ	2490×760×2000	+2~ +8	2,100		

⚠ 請避免陽光直射和遠離熱源，環境溫度不能高於 28° C，或有可能影響製冷效果。
Please avoid direct sunlight and heat sources. The ambient temperature cannot be higher than 28° C, which may affect the cooling effect.

⚠ 靠背請留有空間散熱。
Allow space behind the machine.

＊ 雪櫃內外溫差有機會造成玻璃門上水霧，純屬正常。
Temperature difference between ex/internal of the refrigerator may cause moisture on glass door(s), and this is normal.

*1 新舊製冷劑種類由工廠隨機配置。
Refrigerant type is randomly configured by the factory.

產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.


SD-35


SD-50


XF-50


W-80（平底）


SD-288（平底）


SD-328A (平底)

聯品卧式冷凍展示櫃 Luen Pun Display Freezer

型號 Model	尺寸 – 濶 × 深 × 高 Dimensions – W ×D×H (mm)		溫度範圍 Temperature range (°C)	功率 Power (w)	有效容量 Validity Capacity (L)	冷凍系統 Cooling System	製冷劑 *1 Refrigerant	其他 Others
	外尺寸 Outer	內籠尺寸 Inner						
SD-35	450×410×760	334×294×358	-18 ~ 0	90	35	直冷 Static	R134a/ R290	可配吊籃 optional basket
SD-50	560×410×760	444×294×358	-18 ~ 0	90	50	直冷 Static	R134a/ R290	可配吊籃 optional basket
SD-55	720×330×800	604×216×398	-18 ~ 0	90	55	直冷 Static	R134a/ R290	可配吊籃 optional basket
SD-150	745×540×784	622×420×614	-18 ~ 0	128	150	直冷 Static	R134a/ R290	可配吊籃 optional basket
SD-200	870×545×784	744×420×379	-18 ~ 0	140	200	直冷 Static	R134a/ R290	可配吊籃 optional basket
XF-43A	495×315×860	390×210×495	-18 ~ 0	115	41	直冷 Static	R134a/ R290	–
XF-50	315×545×843	-	-23 ~ 0	120	44	直冷 Static	R134a/ R290	–
W-80	397×652×865	281×536×463	-18 ~ 0	115	70	直冷 Static	R134a/ R290	可配吊籃 optional basket
SD-103	550×550×865	429×429×462	-18 ~ 0	126	103	直冷 Static	R134a/ R290	可配吊籃 optional basket
SD-198	990×550×872	869×430×450	-18 ~ 0	136	198	直冷 Static	R134a/ R290	可配吊籃 optional basket
SD-218 (平底)	1090×550×872	969×430×450	-18 ~ 0	136	218	直冷 Static	R134a/ R290	可配吊籃 optional basket
SD-288 (平底)	1260×620×872	1139×503×450	-18 ~ 0	146	288	直冷 Static	R134a/ R290	可配吊籃 optional basket
SD-328	1380×620×872	1259×503×450	-18 ~ 0	215	328	直冷 Static	R134a/ R290	可配吊籃 optional basket
SD-288A (平底)	1060×660×870	932×535×430	-18 ~ 0	215	288	直冷 Static	R134a/ R290	可配吊籃 optional basket
SD-328A (平底)	1260×660×870	1135×535×430	-18 ~ 0	260	328	直冷 Static	R134a/ R290	可配吊籃 optional basket
SD-408	1380×660×870	1256×535×411	-18 ~ 0	320	408	直冷 Static	R134a/ R290	可配吊籃 optional basket
SD-520	1560×660×870	-	-18 ~ 0	300	520	直冷 Static	R134a/ R290	可配吊籃 optional basket

＊ 雪櫃內外溫差有機會造成玻璃門上水霧，純屬正常。
Temperature difference between ex/internal of the refrigerator may cause moisture on glass door(s), and this is normal.

＊ 以上尺寸不包括 10mm 拉手。
Dimensions not include door handles(10mm).

⚠ 請保持地面清潔及乾爽。
Keep the floor clean and dry.

*1 新舊製冷劑種類由工廠隨機配置。
Refrigerant type is randomly configured by the factory.

產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.



AIF-210S-A



AIF-185E-A



AIF-250E-A



組合島櫃

自動除霜 Auto Defrost

低溫組合島櫃 Combine Island Freezer

型號 Model	尺寸－濶 × 深 × 高 Dimensions – W × D × H (mm)	溫度範圍 Temperature range (°C)	功率 Power (w)	有效容量 Validity Capacity (L)	冷凍系統 Cooling System	製冷劑 Refrigerant
AIF-140S-A	1400×850×835	-25 ~ -18	680	470	直冷 Static	R290
AIF-185E-A	1850×850×750	-25 ~ -18	720	600		
AIF-210S-A	2100×850×835	-25 ~ -18	750	800		
AIF-250S-A	2500×850×835	-25 ~ -18	880	1100		

LED 櫃內照明 Interior LED

自動除霜 Auto Defrost



SD-650BYA

LED 櫃內照明 Interior LED



SF-420QS

低溫玻璃門展示櫃 Display Freezer

型號 Model	尺寸－濶 × 深 × 高 Dimensions – W × D × H (mm)	溫度範圍 Temperature range (°C)	功率 Power (w)	有效容量 Validity Capacity (L)	冷凍系統 Cooling System	製冷劑 Refrigerant
SD-650BYA	1500×890×880	-18 ~ 0	340	650	直冷 Static	R290
SF-420QS	1250×680×850	-26 ~ -18	210	355		–
SF-520QS	1500×680×850	-26 ~ -18	248	430		–

⚠ 請避免陽光直射和遠離熱源，環境溫度不能高於 28° C，或有可能影響製冷效果。
Please avoid direct sunlight and heat sources. The ambient temperature cannot be higher than 28° C, which may affect the cooling effect.

產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.


SD-280


SD-360JY


WD4-275K


SD/SC-246SY


WD-290Y

卧式冷凍展示櫃 Display Freezer

型號 Model	尺寸 – 濶 × 深 × 高 Dimensions – W × D × H (mm)	溫度範圍 Temperature range (°C)	功率 Power (w)	有效容量 Validity Capacity (L)	冷凍系統 Cooling System	製冷劑 Refrigerant
SD-280	986×656×766	-30 ~ -18	253	280	直冷 Static	R290
SD-360JY	1260×705×875	-18 ~ -10	320	360	直冷 Static	R134a / R290 *1
SD/SC-246SY	1033×620×910	-18 ~ 0	200	246	直冷 Static	R134a/ R290 *1
WD4-275K	1115×625×835	-18 ~ 0	190	275	直冷 Static	R290
WD-290Y	1205×625×865	-18 ~ 0	193	290	直冷 Static	R134a/ R290 *1


SD-500BY
SD-500BY-K


WD4-538

型號 Model	尺寸 – 濶 × 深 × 高 Dimensions – W × D × H (mm)	溫度範圍 Temperature range (°C)	功率 Power (w)	有效容量 Validity Capacity (L)	冷凍系統 Cooling System	製冷劑 *1 Refrigerant	其他 Others
SD-500BY SD-500BY-K	1475×757×858	-18 ~ -10	325	500	直冷 Static	R134a/ R290	另有黑色版本 SD-500BY-K
WD4-538	1475×765×895	-18 ~ -10	300	468	直冷 Static	R134a/ R290	–
WD4-768	2000×765×895	-18 ~ -10	390	548	直冷 Static	R134a/ R290	–

⚠ 請避免陽光直射和遠離熱源，環境溫度不能高於 28° C，或有可能影響製冷效果。
Please avoid direct sunlight and heat sources. The ambient temperature cannot be higher than 28° C, which may affect the cooling effect.

✳ 雪櫃內外溫差有機會造成玻璃門上水霧，純屬正常。
Temperature difference between ex/internal of the refrigerator may cause moisture on glass door(s), and this is normal.

*1 新舊製冷劑種類由工廠隨機配置。
Refrigerant type is randomly configured by the factory.

產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.



SD-170
SD-208A
SD-240



SD-170-SS
SD-208A-SS
SD-240-SS

超市陳列櫃 Supermarket Showcase

型號 Model	尺寸 – 濶 × 深 × 高 Dimensions – W × D × H (mm) 外尺寸 Outer	內籠尺寸 Inner	溫度範圍 Temperature range (°C)	功率 Power (w)	有效容量 Validity Capacity (L)	冷凍系統 Cooling System	製冷劑 *1 Refrigerant	其他 Others
SD-170	1410×810×830	1239×639×210	-12 ~ 0	186	170	直冷 Static	R134a/ R290	備有斜台款式
SD-170-SS								不銹鋼
SD-208A	1610×810×830	1440×639×210	-12 ~ 0	186	208	直冷 Static	R134a/ R290	備有斜台款式
SD-208A-SS								不銹鋼
SD-240	1810×810×830	1638×642×210	-12 ~ 0	215	240	直冷 Static	R134a/ R290	備有斜台款式
SD-240-SS								不銹鋼
SD-170-SS-C	1410×810×830	1239×639×210	-12 ~ 0	186	85	直冷 Static	R134a/ R290	304 不銹鋼 / 自動出冰 304 Stainless steel/ Auto ice making
SD-208A-SS-C	1610×810×830	1440×639×210	-12 ~ 0	186	104			
SD-240-SS-C	1810×810×830	1638×642×210	-12 ~ 0	215	120			



SD-568
SD-586
SD-600-II

備有現貨，亦可訂造
TAILOR-MADE WELCOMED



SD-568-BK
SD-586-BK
SD-600-II-BK

型號 Model	尺寸 – 濶 × 深 × 高 Dimensions – W × D × H (mm) 外尺寸 Outer	內籠尺寸 Inner	溫度範圍 Temperature range (°C)	功率 Power (w)	有效容量 Validity Capacity (L)	冷凍系統 Cooling System	製冷劑 *1 Refrigerant	其他 Others
SD-568	1400×810×890	1240×635×435	-18 ~ 0	230	568	直冷 Static	R134a/ R290	可配吊籃 / 有黑色版本 Optional basket/ Available in black also
SD-568-BK								
SD-586	1600×810×890	1440×635×435	-18 ~ 0	230	586			
SD-586-BK								
SD-600-II	1800×810×890	1640×635×435	-18 ~ 0	440	600			
SD-600-II-BK								

▲ 請保持地面清潔及乾爽。
Keep the floor clean and dry.

＊ 雪櫃內外溫差有機會造成玻璃門上水霧，純屬正常。
Temperature difference between ex/internal of the refrigerator may cause moisture on glass door(s), and this is normal.

*1 新舊製冷劑種類由工廠隨機配置。
Refrigerant type is randomly configured by the factory.

產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.



UV
紫外線阻隔設計
UV RESISTANT

電子恒温控制
DIGITAL CONTROL

內置 LED 照明
LED LIGHT

防震櫸木酒架
ANTI-VIBRATION


VZ12BHK


VZ18BHK


VZ188BDHK


VZ24BDHK

Grand Cru 系列 Grand Cru Classe

	型號 Model	尺寸 – 濶 × 深 × 高 Dimensions – W × D × H (mm)	温度範圍 Temperature range (°C)	層架數量 No of Shelves	可放瓶數 No. bottle	功率 Power (w)	重量 Weight (kg)
單溫 Single temperature	VZ12BHK	252×515×615	+8 ~ +18	5	12	75	12
	VZ18BHK	355×515×648	+8 ~ +18	5	18	75	15
雙溫 Dual temperature	VZ18BDHK	355×515×648	+12 ~ +18 (上 Upper) +8 ~ +18 (下 Lower)	4	9+9	100	15
	VZ24BDHK	355×511×850		6	12+12	100	20

VIN™ 防震壓縮機系統
VIN™ SYSTEM

弧型設計
Incurvé door


內置藍色 LED 照明
BLUE LED

保安門鎖
SECURITY

防震櫸木酒架
ANTI-VIBRATION


VZ23SSUG


VZ47SSFG


VZ111SSFG


VZ151SSFG

Incurvé 系列 Incurvé Series

	型號 Model	尺寸 – 濶 × 深 × 高 Dimensions – W × D × H (mm)	温度範圍 Temperature range (°C)	層架數量 No of Shelves	可放瓶數 No. bottle	功率 Power (w)	重量 Weight (kg)
單溫 Single temperature	VZ23SSUG	385×595×818	+5 ~ +18	5	23	85	35
	VZ47SSFG	595×570×825	+5 ~ +18	3	47	100	43
	VZ111SSFG	595×675×1395	+5 ~ +18	5	111	150	71
	VZ151SSFG	595×675×1768	+5 ~ +18	7	151	165	85

＊ 以上尺寸不包括手柄
Dimensions not include handle

產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.

VIN™ 防震壓縮機系統
VIN™ SYSTEM

防凝霧技術
ANTI-CONDENSATION

內置 LED 照明
LED LIGHT

保安門鎖
SECURITY

防震櫸木酒架
ANTI-VIBRATION


VZ46VDUG-L/R


VZ43SDUG


VZ110SDUG


VZ140SDUG


VZ181VDUG-L/R


VZ143VSUG

Pro Black 系列 Pro Black Series

	型號 Model	尺寸 – 濶 × 深 × 高 Dimensions – W × D × H (mm)	溫度範圍 Temperature range (°C)	層架數量 No of Shelves	可放瓶數 No. bottle	功率 Power (w)	重量 Weight (kg)
雙溫 Dual temperature	VZ43SDUG	595×570×825	+5 ~ +12 (上 Upper) +12 ~ +18 (下 Lower)	4	16 + 27	100	51
	VZ110SDUG	595×675×1395	+5 ~ +18 (上及下 Upper & Lower zone)	9	55 + 55	155	86
	VZ140SDUG	595×675×1768		9+1*2	74 + 66	165	105
	VZ46VDUG-L*	595×570×813	+5 ~ +20 (上及下 Upper & Lower zone)	5	16 + 30	140	52
	VZ46VDUG-R*1	595×570×813					
	VZ181VDUG-L*	665×685×1835	+5 ~ +20 (上及下 Upper & Lower zone)	11+1*2	89 + 92	280	128
	VZ181VDUG-R*1	665×685×1835					
單溫 Single temperature	VZ143VSUG	655×680×1835	+5 ~ +22	12	142	190	116

* 左門較 Left Hinge　*1 右門較 Right Hinge　*2 展示層架 Display Shelve

VIN™ 防震壓縮機系統
VIN™ SYSTEM

內置 LED 照明
LED LIGHT

不銹鋼門
STAINLESS STEEL DOOR

茶色玻璃
TINTED GLASS


VZ07SSUG


VZ19SSUG


VZ22BI

嵌入式系列 Built-in Series

	型號 Model	尺寸 – 濶 × 深 × 高 Dimensions – W × D × H (mm)	溫度範圍 Temperature range (°C)	層架數量 No of Shelves	可放瓶數 No. bottle	功率 Power (w)	重量 Weight (kg)
單溫 Single temperature	VZ07SSUG	148×500×825 155×540×830(嵌入式 Push-in)	+5 ~ +18	6	7	60	19
	VZ19SSUG	295×616×820 305×620×830(嵌入式 Push-in)	+5 ~ +18	4	19	85	32
	VZ22BI	590×558×455	+5 ~ +18	3	22	70	—

產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.

＊ 以上尺寸不包括手柄
Dimensions not include handle


OXP1T98NPD


OXP1T98NVSD


OXM1T182NVSD


OXG1T230NPD


OXG1T230NVSD

溫度控制
TEMPERATURE

濕度控制
HUMIDITY

減低震動
LACK OF VIBRATION

空氣循環
AIR CIRCULATION

高品質的儲酒空間
SUITABLE STORAGE

紫外線的阻隔
PROTECTION FROM LIGHT


OXG2T206NVSD



OXGMT225NVSD

法國 ArteVino 單溫 / 雙溫區電子酒櫃　ArteVino Wine Cabinet - Single/ Dual Temperature Zones

	型號 Model	尺寸 – 濶 × 深 × 高 Dimensions – W × D × H (mm)	溫度範圍 Temperature range (°C)	層架數量 No of Shelves	可放瓶數 No. bottle	功率 Power (w)	重量 Weight (kg)
單溫 Single Temperature	OXP1T98NPD	680×700×960	+9 ~ +15	2	98	60	50
	OXP1T98NVSD	680×690×960	+9 ~ +15	2	98	60	52
	OXM1T182NVSD	680×720×1480	+9 ~ +15	3	182	65	74
	OXG1T230NPD	680×700×1825	+9 ~ +15	4	230	70	82
	OXG1T230NVSD	680×690×1825	+9 ~ +15	4	230	70	104
雙溫 Dual Temperature	OXG2T206NVSD	680×690×1825	+10 ~ +14 (上 Upper) +3 ~ +6 (下 Lower)	7	206	65	108
	OXGMT225NVSD	680×690×1825	+15 ~ +20 (上 Upper) +6 ~ +10 (下 Lower)	5	225	70	86

- 一體式壓縮機制冷機組
  Self-contained air-cooled condensing unit at bottom
- 百葉窗特別設計，以適應不同的室內環境
  Special louvre design to fit in different interior environment
- 2 扇防霧氣雙層強化發熱玻璃門
  2 nos. heated double glazed hinged door

可訂造
TAILOR-MADE

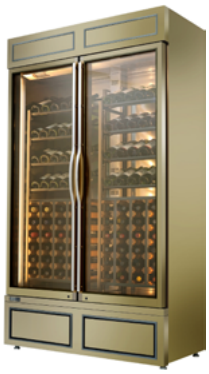
LWC-1D-S / LWC-2D-S


LC-110


JC-183W

紅酒冷藏展示櫃　Wine Display Wine Cabinet

型號 Model		LWC-1D-S	LWC-2D-S
尺寸 – 濶 × 深 × 高 Dimensions – W × D × H	mm	600×600×2100	1200×600×2100
玻璃門 Glass Door	qty	1	2
可放瓶數 No. bottle		50	100
溫度範圍 Temp. range	℃	+5 ~ +16	
濕度 Humidity	%	55 ~ 70	
電壓 Power Supply	kW	220V/50Hz/1Ph, 13amp	
製冷劑 Refrigerant		R404a	

型號 Model		LC-110	JC-183W
尺寸 – 濶 × 深 × 高 Dimensions – W × D × H	mm	490×530×880	550×510×1335
可放瓶數 No. bottle		33	47
溫度範圍 Temp. range	℃	+5 ~ +20	+5 ~ +20
容量 Capacity	L	110	183
噪音 Noise	dBA	≤40	≤40
淨重 Net weight	kg	30	38
製冷劑 Refrigerant		R600a	R600a

產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.

產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.



SMR-CDC75C(E)-L
SMR-CDC75CH3(E)-L



RT-58L(1R)



RT-98L



RT-215L



RT-235L-2

四邊玻璃冷藏 / 冷熱展示櫃 Refrigerated Display Cabinet

型號 Model	尺寸 – 濶 × 深 × 高 Dimensions – W × D × H (mm)	溫度範圍 Temperature range (°C)	功率 Power (w)	有效容量 Validity Capacity (L)	冷凍系統 Cooling System	製冷劑 *1 Refrigerant	其他 Others
SMR-CDC75C(E)-L	470×463×880	+3 ~ +10	387	68	風冷 Ventilated	–	前後掩門 Front & Back, Swing
SMR-CDC75CH3(E)-L	470×463×880	+3 ~ +10 /+50~+55	387	68	風冷 Ventilated	–	冷熱展示櫃 Hot& Cold Showcase
RT-58L(1R)	425×404×830	+3 ~ +12	180	61	風冷 Ventilated	R134a / R290	另有黑框款式 available in black also
RT-98L(1R)	425×404×1080	+3 ~ +12	180	96	風冷 Ventilated	R134a / R290	
RT-215L	515×485×1595	+3 ~ +12	250	215	風冷 Ventilated	R134a / R290	–
RT-235L-2	515×485×1835	+3 ~ +12	280	235	風冷 Ventilated	R134a / R290	–



可配防霧玻璃門
Multi-paned heated glass



SC-50

櫃頂燈箱
Lightbox on top



SD/SC-80(雙溫)

○ 白框
● 黑框

■ SC-85 可訂製不鏽鋼框、灰框、黑框或全黑內膽
SC-85 Optional SS, Gray or Black frames and also customized in black color Inside.



SC-85

● 不鏽鋼 ● 黑框 ○ 灰框 ● 全黑內外

座枱式冷藏 / 冷凍展示櫃 Desktop Refrigerator / Freezer

型號 Model	尺寸 – 濶 × 深 × 高 Dimensions – W × D × H (mm)	溫度範圍 Temperature range (°C)	功率 Power (w)	有效容量 Validity Capacity (L)	冷凍系統 Cooling System	製冷劑 *1 Refrigerant	其他 Others
SC-50	445×465×520	+4 ~ +12	100	52	直冷 Static	R134a / R290	可另配防霧玻璃門 Can be equipped Multi-paned heated glass
SD/SC-80 (雙溫)	570×500×600	+2 ~ +8 / -20	130/160	50	直冷 Static	R290	
SC-85	470×560×840	+3 ~ +10	105	85	風冷 Ventilated	R134a / R290	

＊ 雪櫃內外溫差有機會造成玻璃門上水霧，純屬正常。
Temperature difference between ex/internal of the refrigerator may cause moisture on glass door(s), and this is normal.

*1 新舊製冷劑種類由工廠隨機配置。
Refrigerant type is randomly configured by the factory.

產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.

L … 燈箱 H … 玻璃門發熱線 W … 低溫 F … 風冷 -2 … 2 門 -3 … 3 門 -4 … 4 門



RTW-128L



RTW-40L



RTW-118L



CD 800 / CD 1200

座枱式展示櫃 Desktop Showcase

型號 Model	尺寸 – 濶 × 深 × 高 Dimensions – W × D × H (mm)	溫度範圍 Temperature range (°C)	功率 Power (w)	有效容量 Validity Capacity (L)	冷凍系統 Cooling System	製冷劑 *1 Refrigerant
RTW-40L	680×575×335	+2 ~ +12	110 / 105	40	風冷 Ventilated	R134a / R600a/R290
RTW-128L	685×874×419	+2 ~ +10	110 / 105	128	風冷 Ventilated	R134a / R600a/R290
RTW-118L	695×882×417	+2 ~ +12	110 / 105	118	風冷 Ventilated	R134a / R600a/R290
CD 800	785 × 650 × 735	+2 ~ +10	390	2 × GN 1/1	風冷 Ventilated	R134a
CD 1200	1185 × 650 × 735	+2 ~ +10	490	3 × GN 1/1	風冷 Ventilated	R134a



RTW-120L-4/ RTW-160L-4



RTS-360L



RTS-390L



SC-105B

冷藏展示櫃 Refrigerated Display Cabinet

型號 Model	尺寸 – 濶 × 深 × 高 Dimensions – W × D × H (mm)	溫度範圍 Temperature range (°C)	功率 Power (w)	有效容量 Validity Capacity (L)	冷凍系統 Cooling System	製冷劑 *1 Refrigerant
RTW-120L-4	702×568×686	+2 ~ +12	230/160	120	風冷 Ventilated	R134a / R600a/R290
RTW-160L-4	880×568×686	+2 ~ +12	230/160	160	風冷 Ventilated	R134a / R600a/R290
RTW-202L-4	1219×568×686	+2 ~ +12	400/360	200	風冷 Ventilated	R134a / R600a/R290
RTS-360L	876×945×1520	+3 ~ +10	1400 / 1300	360	風冷 Ventilated	R404a / R290/R290
RTS-390L	920×847×1510	+3 ~ +10	1400 / 1300	390	風冷 Ventilated	R404a / R290/R290
SC-105B	420×480×1875	+0 ~ +10	120	105	風冷 Ventilated	R134a/R600a/R290

⚠ 請避免陽光直射和遠離熱源，環境溫度不能高於 28° C，或有可能影響製冷效果。
Please avoid direct sunlight and heat sources. The ambient temperature cannot be higher than 28° C, which may affect the cooling effect.

*1 新舊製冷劑種類由工廠隨機配置。
Refrigerant type is randomly configured by the factory.

H … 玻璃門發熱線　F … 風冷　-2 … 2 門　-3 … 3 門　-4 … 4 門

產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.

聯品掩門冷藏展示櫃
Luen Pun Solid Door Refrigerated Display Cabinet

■ 可訂製門框
Customized frames.





可配防霧玻璃門
Multi-paned heated glass



LG4-238F-2　LG4-288F　LG4-318F-2　LG4-310　LG4-383FC

型號 Model	尺寸 *1– 濶 × 深 × 高 Dimensions *1– W ×D×H (mm)	温度範圍 Temperature range (°C)	功率 Power (w)	有效容量 Validity Capacity (L)	層板 Shelves	冷凍系統 Cooling System	製冷劑 *2 Refrigerant
LG4-238F-2	840×510×1305	+3 ~ +10	200	238	3	風冷 Ventilated	R134a/ R290
LG4-138F	510×520×1305	+3 ~ +10	125	138	3	風冷 Ventilated	R134a/ R290
LG4-188F	540×515×1510	+3 ~ +10	140	188	3	風冷 Ventilated	R134a/ R290
LG4-298F	540×585×1860	+3 ~ +10	240	298	4	風冷 Ventilated	R134a/ R290
LG4-288F	600×575×1670	+3 ~ +10	240	288	4	風冷 Ventilated	R134a/ R290
LG4-338F	600×585×1860	+3 ~ +10	280	318	4	風冷 Ventilated	R134a/ R290
LG4-360F	660×615×1870	+3 ~ +10	310	360	4	風冷 Ventilated	R134a/ R290
LG4-318F-2 (上下門)	600×585×1860	+3 ~ +10	280	318	4	風冷 Ventilated	R134a/ R290
LG4-360F-2 (上下門)	660×615×1870	+3 ~ +10	310	360	4	風冷 Ventilated	R134a/ R290
LG4-383FC	600×650×1930	+3 ~ +10		383	4	風冷 Ventilated	R134a/ R290
LG4-310 (雙溫)	610×600×1850	-18/ +1 ~ +10	219	310	3	直冷 Static	R404a/R134a/ R290

＊ 雪櫃內外溫差有機會造成玻璃門上水霧，純屬正常。
Temperature difference between ex/internal of the refrigerator may cause moisture on glass door(s), and this is normal.

*1 以上尺寸不包括門把。
Dimensions not include door handles.

*2 新舊製冷劑種類由工廠隨機配置。
Refrigerant type is randomly configured by the factory.

產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.



LG4-288L
LG4-338L
LG4-383L



LG4-510LF-2
LG4-608LF-2
LG4-768LF-2



■ 櫃頂燈箱
Lightbox on top

■ 櫃內照明
Interior Lighting

聯品掩門冷藏展示櫃 Luen Pun Solid Door Refrigerated Display Cabinet

型號 Model	尺寸 *1*2– 濶 × 深 × 高 Dimensions *1*2– W ×D×H (mm)	溫度範圍 Temperature range (°C)	功率 Power (w)	有效容量 Validity Capacity (L)	層板 Shelves	冷凍系統 Cooling System	製冷劑 *4 Refrigerant
LG4-288L	600×575×1910	+3 ~ +10	136	288	4	直冷 Static	R134a/R290
LG4-338L	600×625×2060	+3 ~ +10	157	338			
LG4-383L	660×625×2020	+3 ~ +10	162	383			
LG4-510LF-2	1020×625×1885	+3 ~ +10	195	510	8	風冷 Ventilated	R134a/R290
LG4-608LF-2	1080×625×2025	+3 ~ +10	236	608			
LG4-768LF-2	1260×625×2085	+3 ~ +10	306	768			
LG4-1330LFII-3	1825×700×2050	+3 ~ +10	561	1330	12		



LG4-600FC



LG4-2FHW



LG4-1500FC-3

組合式設計 · 慳位耐用

適合超級市場、便利店安裝
Suitable for supermarket & 24-hour store

■ 680 / 780 深度選擇
Depth 680 / 780

■ 平頂風冷，高效節能
High Efficiency vertical air-cooling syste

■ 玻璃門發熱線
Glass-door heating wire

聯品機後型鋁合金掩門冷藏展示櫃 Luen Pun Aluminum Solid Door Display Cabinet

型號 Model	尺寸 *3– 濶 × 深 × 高 Dimensions*3 – W ×D×H (mm)	溫度範圍 Temperature range (°C)	功率 Power (w)	有效容量 Validity Capacity (L)	層板 Shelves	冷凍系統 Cooling System	製冷劑 *4 Refrigerant
LG4-600FC	670×680×1865	+3 ~ +10	400	600	4	翅片風冷 Ventilated	R134a/R290
LG4-680FC	670×780×1865	+3 ~ +10	400	680			
LG4-1000FC-2H	1260×680×1865	+3 ~ +10	460	1000	8	翅片風冷 Ventilated	R134a/R290
LG4-1080FC-2H	1260×780×1865	+3 ~ +10	460	1080			
LG4-1500FC-3H	1860×680×1865	+3 ~ +10	700	1500	12	翅片風冷 Ventilated	R134a/R290
LG4-1580FC-3H	1860×780×1865	+3 ~ +10	700	1580			

⚠ 靠背請留有空間散熱。
Allow space behind the machine.

✳ 雪櫃內外溫差有機會造成玻璃門上水霧，純屬正常。
Temperature difference between ex/internal of the refrigerator may cause moisture on glass door(s), and this is normal.

*4 新舊製冷劑種類由工廠隨機配置。
Refrigerant type is randomly configured by the factory.

*1 以上尺寸不包括門把。
Dimensions not include door handles.

*2 以上尺寸深度不包括燈箱（突出 25mm）。
Depth dimensions not include light box (25mm).

*3 尺寸不包括門把與背掛。
Dimensions not include door handles and back hanging.

L … 燈箱 M … 直冷 F … 風冷 II … 雙機頭 -2 … 2 門 -3 … 3 門

產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.




■ 冷藏 / 冷凍
Refrigerated / Freezed

■ 立式風冷
High Efficiency vertical air-cooling system

■ 櫃頂燈箱
Lightbox on top

■ 玻璃門發熱線
Glass-door heating wire

■ 可訂製金框、銀框或黑框
Optional Golden, Silver or Black frames


金框
GOLDEN


銀框
SILVER


黑框
BLACK


LG4-580LF-HW


LG4-980LF-2HW


LG4-1460LF-3HW

聯品鋁合金掩門展示櫃 Luen Pun Aluminum Solid Door Display Cabinet

型號 Model	尺寸 *1– 濶 × 深 × 高 Dimensions*1 – W × D × H (mm)	溫度範圍 Temperature range (°C)	功率 Power (w)	有效容量 Validity Capacity (L)	層板 Shelves	冷凍系統 Cooling System	製冷劑 *2 Refrigerant
LG4-580LF-H	670×710×2040	+3 ~ +10	350	580	4	翅片風冷 Ventilated	R134a / R290
LG4-580LF-HW	670×710×2040	-18 ~ 0	650	580	4	翅片風冷 Ventilated	R404 / R290
LG4-590LF-H	670×810×2040	+3 ~ +10	350	590	4	翅片風冷 Ventilated	R134a / R290
LG4-590LF-HW	670×810×2040	-18 ~ 0	650	590	4	翅片風冷 Ventilated	R404 / R290
LG4-680LF-2H	890×710×2040	+3 ~ +10	550	680	8	翅片風冷 Ventilated	R134a / R290
LG4-680LF-2HW	890×710×2040	-18 ~ 0	600	680	8	翅片風冷 Ventilated	R404 / R290
LG4-980LF-2H	1260×710×2040	+3 ~ +10	450	980	8	翅片風冷 Ventilated	R134a / R290
LG4-980LF-2HW	1260×710×2040	-18 ~ 0	950	980	8	翅片風冷 Ventilated	R404 / R290
LG4-990LF-2H	1260×810×2040	+3 ~ +10	450	990	8	翅片風冷 Ventilated	R134a / R290
LG4-990LF-2HW	1260×810×2040	-18 ~ 0	1100	990	8	翅片風冷 Ventilated	R404 / R290
LG4-1460LF-3H	1860×710×2040	+3 ~ +10	480	1460	12	翅片風冷 Ventilated	R134a / R290
LG4-1460LF-3HW	1860×710×2040	-18 ~ 0	1350	1460	12	翅片風冷 Ventilated	R404 / R290
LG4-1490LF-3H	1860×810×2040	+3 ~ +10	480	1490	12	翅片風冷 Ventilated	R134a / R290
LG4-1490LF-3HW	1860×810×2040	-18 ~ 0	2200	1490	12	翅片風冷 Ventilated	R404 / R290

⚠ 雪櫃頂部請預留 300 mm 空間散熱。
Allow at least 300 mm clearance from the ceiling.

*1 尺寸不包括門把與背掛。
Dimensions not include door handles and back hanging.

✳ 雪櫃內外溫差有機會造成玻璃門上水霧，純屬正常。
Temperature difference between ex/internal of the refrigerator may cause moisture on glass door(s), and this is normal.

*2 新舊製冷劑種類由工廠隨機配置。
Refrigerant type is randomly configured by the factory.

產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.

L … 燈箱 M … 直冷 F … 風冷 II … 雙機頭 -2 … 2 門



NFG-309F




FC-BS75AH-H/
FD-BS75AH-H



FC-BD126AH/ FC-BD126AH-H/
FD-BD126AH-H

- 電熱除霧玻璃
  Defrost glasses
- 無霜風冷式冷凍系統
  Frost-free air-cooled refrigeration system
- 獨立內循環風道設計
  Independent internal circulation air duct design
- 全鋁合金門框
  Aluminum alloy door frame
- 底置整機風冷
  Bottom Ventilated

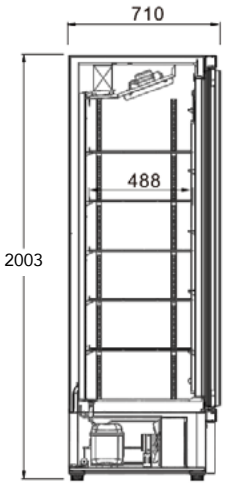



FC-BT188AH/ FC-BT188AH-H/
FD-BT188AH-H



FC-BF250AH/ FC-BF250AH-H

聯品底置冷凍冷藏展示櫃 Luen Pun Bottom Mounted Coolers/Freezers

型號 Model		尺寸－濶 × 深 × 高 Dimensions– W ×D×H (mm)	溫度範圍 Temperature range (°C)	功率 Power (w)	有效容量 Validity Capacity (L)
NFG-309F	單門掩門冷凍	605×680×1855	-18 ~ 0	450	271
FC-BS75AH-H	底置單門冷藏	750×710×2003	+1 ~ +10	323	614
FD-BS75AH-H	底置單門冷凍	750×760×2003	-22 ~ -18	650	560
FC-BD126AH FC-BD126AH-H	底置雙門冷藏	1253×710×2003	+1 ~ +10	460	1081
FD-BD126AH-H	底置雙門冷凍	1253×760×2003	-22 ~ -18	1205	930
FC-BT188AH FC-BT188AH-H	底置三門冷藏	1880×710×2003	+1 ~ +10	880	1664
FD-BT188AH-H	底置三門冷凍	1880×760×2003	-22 ~ -18	1820	1450
FC-BF250AH FC-BF250AH-H	底置四門冷藏	2508×710×2003	+1 ~ +10	1380	2248

＊ 雪櫃內外溫差有機會造成玻璃門上水霧，純屬正常。
Temperature difference between ex/internal of the refrigerator may cause moisture on glass door(s), and this is normal.

產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.

聯品趟門冷藏展示櫃
Luen Pun Sliding Glass Door Refrigerated Display Cabinet

- 立式風冷
  Vertical Air-cooled
- 自動回力門 省力又環保
  Auto-reverse door
- 櫃內照明
  Interior Lighting


LG4-190FC-2


LG4-190FC


LG4-380/ LG4-380F


LG4-238FC-2


LG4-500LFC-2


LG4-518LFC-2


LG4-828LFC-2

型號 Model	尺寸 *1– 濶 × 深 × 高 Dimensions*1 – W ×D×H (mm)	温度範圍 Temperature range (°C)	功率 Power (w)	有效容量 Validity Capacity (L)	層板 Shelves	冷凍系統 Cooling System	製冷劑 *2 Refrigerant
LG4-380/ LG4-380F	760×600×1900	+3 ~ +8	280	380	4	風冷 Ventilated	R134a/R290
LG4-190FC	830×455×810	+1 ~ +10	150	190	1	風冷 Ventilated	R134a/R290
LG4-190FC-2	1200×455×810	+3 ~ +10	230	238	3	風冷 Ventilated	R134a/R290
LG4-238FC-2	830×455×1265	+3 ~ +10	230	238	3	風冷 Ventilated	R134a/R290
LG4-500LFC-2	890×545×1850	+3 ~ +10	530	500	8	風冷 Ventilated	R134a/R290
LG4-518LFC-2	890×630×2025	+3 ~ +10	530	518	8	風冷 Ventilated	R134a/R290
LG4-688LFC-2	1165×630×2025	+3 ~ +10	600	688	8	風冷 Ventilated	R134a/R290
LG4-828LFC-2	1380×630×2025	+3 ~ +10	640	828	8	風冷 Ventilated	R134a/R290

＊ 雪櫃內外溫差有機會造成玻璃門上水霧，純屬正常。
Temperature difference between ex/internal of the refrigerator may cause moisture on glass door(s), and this is normal.

*1 以上尺寸深度不包括燈箱（突出 25mm）。
Depth dimensions not include light box (25mm).

⚠ 靠背請留有空間散熱。
Allow space behind the machine.

*2 新舊製冷劑種類由工廠隨機配置。
Refrigerant type is randomly configured by the factory.

產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.
L … 燈箱　M … 直冷　F … 風冷　II … 雙機頭　-2 … 2 門

VESTFROST SOLUTIONS

DENMARK IMPORTED 丹麥進口



FKG-311



FKG-370



FKG-371



NFG-309

不銹鋼門
Stainless Steel Door



CFS 344 STEEL

■ 明管直冷
Exposed Pipes Static

VESTFROST 展示櫃 VESTFROST Display coolers

型號 Model	尺寸 – 濶 × 深 × 高 Dimensions – W × D × H (mm)	溫度範圍 Temperature range (°C)	功率 Power (w)	容積 Volume	製冷劑 Refrigerant	貨籃數量 No. of baskets	冷凍系統 Cooling System
FKG311	600×595×1560	+4 ~ +12	250	281 / 220	R600a / 50g	4+1 no.	風冷 Ventilated
FKG370	595×595×1850	+3 ~ +10	350	347	R134a / R600a	-	
FKG371	600×595×1860	+2 ~ +10	350	350 / 285	R600a / 50g	5+1 no.	
NFG309	600×595×1860	-25 ~ -16	680	310 / 282	R290 / 85g	5+1 no.	風冷 Ventilated
CFS344 STEEL	600×595×1860	-18	180 / 140	345 / 311	R600a / 92g	7 no.	明管直冷 Exposed Pipes Static



M85



M95



M150



M180



M210

丹麥 VESTFROST 展示櫃 VESTFROST Display coolers

型號 Model	尺寸 – 濶 × 深 × 高 Dimensions – W × D × H (mm)	溫度範圍 Temperature range (°C)	功率 Power (w)	容積 Volume	製冷劑 Refrigerant / amount	貨架數量 No. of shelves	冷凍系統 Cooling System
M85	493×577×830 (not including handle)	+2 ~ +10	96	138 / 124	R600a / 30g	2 full / 1 half	風冷 Ventilated
M95	595×562×820	+2 ~ +10	100	164 / 146	-	3	
M150	600×595×1560	+2 ~ +10	250	281 / 193	R600a / 50g	4 + 1	
M180	600×595×1860	+1 ~ +7	350	350 / 255	R600a / 50g	5+1	
M210	595×595×2000	+1 ~ +10	570	404 / 333	R600a / 60g	6 baskets	

＊ 雪櫃內外溫差有機會造成玻璃門上水霧，純屬正常。
Temperature difference between ex/internal of the refrigerator may cause moisture on glass door(s), and this is normal.

⚠ 靠背請留有空間散熱。
Allow space behind the machine.

產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.

丹麥進口展示櫃 DENMARK IMPORTED REFRIGERATED DISPLAY CABINET

MADE IN TAIWAN
台灣製造

- 冷凍系列可低至 -24ºC
  Freezer series can reach -24ºC
- 採用微電子數位式冷藏冷凍系統控制器
  Digital controller with temperature display
- 內設照明燈光
  Internal lighting
- 底座水盤自動蒸發設計
  Self-evaporating water tray
- 全自動定時除霧
  Automatic defrost
- 櫃內照明
  Interior Lighting



-18ºC* 食品保存標準
Reliable temperature

* 低溫型號 Freezers only



防霧熱鍍膜玻璃
自動除霧功能
Anti-fog glass
Automatic defrost

雪櫃頂部請預留 300 mm 空間散熱
Allow at least 300 mm clearance from the ceiling.



RS-S2002C / RS-S2002F



RS-S2003C / RS-S2004F



RS-S2009C / RS-S2010F

台灣玻璃門展示櫃（上置機頭） Top mounted Showcase

型號 Model	尺寸 – 濶 × 深 × 高 Dimensions – W × D × H (mm)	溫度範圍 Temperature range (°C)	功率 Power (w)	有效容量 Validity Capacity (L)	層板 Shelves	冷凍系統 Cooling System	製冷劑 Refrigerant
RS-S2002C	640×700×2040	+3 ~ +8	440	500	5	風冷 Ventilated	R134a
RS-S2002F	640×700×2040	-20 ~ -16	770	500	5	風冷 Ventilated	R404a
RS-S2003C	1260×700×2040	+3 ~ +8	770	970	10	風冷 Ventilated	R134a
RS-S2004F	1260×700×2040	-20 ~ -16	1210	970	10	風冷 Ventilated	R404a
RS-S2009C	1870×700×2040	+3 ~ +8	880	1455	15	風冷 Ventilated	R134a
RS-S2010F	1870×700×2040	-20 ~ -16	1320	1455	15	風冷 Ventilated	R404a

＊ 可訂造 800 mm 深。
Can be tailor-made 800 mm depth.

⚠ 雪櫃頂部請預留 300 mm 空間散熱。
Allow at least 300 mm clearance from the ceiling.

＊ 雪櫃內外溫差有機會造成玻璃門上水霧，純屬正常。
Temperature difference between ex/internal of the refrigerator may cause moisture on glass door(s), and this is normal.

產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.

MADE IN TAIWAN
台灣製造

- ■ 內設照明燈光 Internal lighting.
- ■ 自動除霧 Automatic defrost.
- ■ 櫃內照明 Interior Lighting


RS-S1014BC


RS-S1014AC


RS-S2003UNC / RS-S2004UNF


RS-S2009UNC / RS-S2010UNF

台灣玻璃門展示櫃（下置機頭） Bottom mounted Showcase

型號 Model	尺寸－濶 × 深 × 高 Dimensions – W × D × H (mm)	溫度範圍 Temperature range (°C)	功率 Power (w)	有效容量 Validity Capacity (L)	層板 Shelves	冷凍系統 Cooling System	製冷劑 Refrigerant
RS-S1014BC	600×620×1580	+3 ~ +8	400	320	4	風冷 Ventilated	R134a
RS-S1014AC	600×620×1890	+3 ~ +8	440	407	4	風冷 Ventilated	R134a
RS-S2003UNC	1260×700×2040	+3 ~ +8	770	970	10	風冷 Ventilated	R134a
RS-S2004UNF	1260×700×2040	-20 ~ -16	1210	970	10	風冷 Ventilated	R404a
RS-S2009UNC	1870×700×2040	+3 ~ +8	880	1455	15	風冷 Ventilated	R134a
RS-S2010UNF	1870×700×2040	-20 ~ -16	1320	1455	15	風冷 Ventilated	R404a

MADE IN TAIWAN
台灣製造



防霧熱鍍膜玻璃
自動除霧功能
Anti-fog glass
Automatic de-frost

- ■ 內設照明燈光 Internal lighting
- ■ 自動除霧 Automatic defrost
- ■ 櫃內照明 Interior Lighting

趟門設計 Slide Door


RS-S2005C

台灣玻璃趟門展示櫃（上置機頭） Sliding door top mounted Showcase

型號 Model	尺寸－濶 × 深 × 高 Dimensions – W × D × H (mm)	溫度範圍 Temperature range (°C)	功率 Power (w)	有效容量 Validity Capacity (L)	層板 Shelves	冷凍系統 Cooling System	製冷劑 Refrigerant
RS-S2005C	1260×800×2040	+3 ~ +8	770	970	10	風冷 Ventilated	R134a
RS-S2011C	1870×800×2040	+3 ~ +8	880	1400	10		

▲ 雪櫃頂部請預留 300 mm 空間散熱。
Allow at least 300 mm clearance from the ceiling.

＊ 雪櫃內外溫差有機會造成玻璃門上水霧，純屬正常。
Temperature difference between ex/internal of the refrigerator may cause moisture on glass door(s), and this is normal.

產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.

Panasonic 樂聲牌



SRL-PT2075THCPBFDA



SRL-PT4075THBBFD



SRM-CD471(E)-L/ SRM-CD471(E)-L-C



SRM-CDC319NL-TS3(E)/
SRM-CD419NL-TS4(E)



SRM-CD671(E)-L



SAR-CD361L(HK)



SAR-CD461L(HK)

開放式展示櫃 OPEN REFRIGERATOR SHOWCASE

- ■ 五層均有 LED 燈照明
  LED lighting for 5 shelves
- ■ 可調式層架
  Angle adjustable shelves
- ■ 夜簾
  Night blind
- ■ 外置電子溫度及控制
  External electronic temperature control

日本樂聲牌展示櫃 Panasonic Display Cabinet

型號 Model	尺寸 – 濶 × 深 × 高 Dimensions – W × D × H (mm)	溫度範圍 Temperature range (°C)	有效容量 Validity Capacity (L)	冷凍系統 Cooling System	製冷劑 Refrigerant	其他 Other
SAR-CD361L(HK)	967×(705+25)×1900	0 ~ -7	360	風冷 Ventilated	R404A	5 層板 Shelves
SAR-CD461L(HK)	1271× (705+25)×1900	0 ~ -7	427	風冷 Ventilated	R404A	5 層板 Shelves
SRM-CD471(E)-L	1216×849×1900	+3 ~ +7	858	風冷 Ventilated	R134a	5 層板 Shelves
SRM-CD471(E)-L-C	1216×849×1900	+3 ~ +7	858	風冷 Ventilated	R134a	5 層板 Shelves
SRM-CDC319NL-TS3(E)	900×650 ×1947	+3 ~ +7	620	風冷 Ventilated	R134a	5 層板 Shelves
SRM-CD419NL-TS4(E)	1200× 650×1900	+1 ~ +5	920			趟門式 Slide 2-door type
SRM-CD671(E)-L	1824×849×1900	+1 ~ +5	1318	風冷 Ventilated	R134a	5 層板 Shelves
SRL-PT2075THCPBFDA	670×710(+50) ×1927	-25 ~ -20	265	風冷 Ventilated	R404A	三層強化玻璃門 Three-layer tempered glass
SRL-PT4075THBBFD	1356× 710(+50)×1900	-25 ~ -20	618			

＊ 雪櫃內外溫差有機會造成玻璃門上水霧，純屬正常。
Temperature difference between ex/internal of the refrigerator may cause moisture on glass door(s), and this is normal.

⚠ 靠背請留有空間散熱。
Allow space behind the machine.

產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.



BD-62FA


BD-198


BD-218


BD-268A


BD-308


BD-358


BD-468


BD/BC-118A146D


BD/BC-178D


BD/BC-228D


BD/BC-268D

聯品卧式冷凍櫃 Luen Pun Chest Freezer

型號 Model	尺寸 *1– 濶 × 深 × 高 Dimensions*1 – W ×D×H (mm)		功率 Power (w)	有效容量 Validity Capacity (L)	温度範圍 Temperature range (°C)	冷凍系統 Cooling System	製冷劑 *2 Refrigerant
	外尺寸 Outer	內籠尺寸 Inner					
BD-62FA	405×560×825	–	86	62	-30 ~ 0	直冷 Static	R134a/R600a/R290
BD-198	952×545×860	825×376×636	120	198	-18 ~ 0	直冷 Static	R134a/R290
BD-218	760×670×860	634×500×636	144	218			
BD-268A	910×670×860	784×500×636	167	268			
BD-308	1095×670×920	965×500×698	187	308			
BD-358	1260×670×860	1134×500×636	215	358			
BD-468	1360×670×860	1234×500×636	240	468			
BD-100K	520×540×835	–	80	102	-18 ~ 0	直冷 Static	R600a/R290
BD-148K	710×540×835	–	85	148			
BD/BC-118A146D	535×502×820	–	95	146	-18 ~ +5	直冷 Static	R290
BD/BC-178D	715×512×820	–	100	178			
BD/BC-228D	880×522×820	–	115	228			
BD/BC-268D	985×562×820	–	130	268			

⚠ 請保持地面清潔及乾爽。
Keep the floor clean and dry.

*1 以上尺寸不包括門把（突出 45mm）。
Depth dimensions not include door handles (45mm).

*2 新舊製冷劑種類由工廠隨機配置。
Refrigerant type is randomly configured by the factory.

產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.

雙壓縮機
保冷



BD-1650 II -3

聯品卧式冷凍櫃 Luen Pun Chest Freezer

型號 Model	尺寸 – 濶 × 深 × 高 Dimensions – W × D × H (mm) 外尺寸 Outer	內籠尺寸 Inner	功率 Power (w)	有效容量 Validity Capacity (L)	溫度範圍 Temperature range (°C)	冷凍系統 Cooling System	製冷劑 *2 Refrigerant	其他 Others
BD-680II-2	2100×740×940	1958×538×722	390	680	-18 ~ 0	直冷 Static	R134a/R290	可配吊籃 optional basket
BD-1000II-2	2430×790×940	2288×588×722	518	1000				
BD-1650II-3	3100×890×940	2958×688×722	706	1650				



BD-106



BD-52



BD-70 / BD-70-1



BD-103



BD-268-1 / BD-328-1



BD-508-2
BD-580-2

型號 Model	尺寸 – 濶 × 深 × 高 Dimensions – W × D × H (mm) 外尺寸 Outer	內籠尺寸 Inner	功率 Power (w)	有效容量 Validity Capacity (L)	溫度範圍 Temperature range (°C)	冷凍系統 Cooling System	製冷劑 *2 Refrigerant	其他 Others
BD-106	475×375×620	-	100	50	-18 ~ 0	直冷 Static	R600a/R290	可配吊籃 optional basket
BD-52	330×525×865	205×378×405	80	52	-18 ~ 0	直冷 Static	R134a/R290	–
BD-70	405×565×865	285×419×437	90	70				
BD-70-1	540×420×865	419×285×437	90	70				
BD-103	540×540×865	420×420×437	139	103				
BD-268-1 (平底)	1130×680×920	1012×502×490	157	26 8	-18 ~ 0	直冷 Static	R134a/R290	可配吊籃 optional basket
BD-328-1 (平底)	1245×680×920	1125×502×490	162	328				
BD-508-2	1595×680×940	1477×502×720	259	508				
BD-580-2	1715×740×940	1573×538×720	306	580				


⚠ 請保持地面清潔及乾爽。
Keep the floor clean and dry.

*2 新舊製冷劑種類由工廠隨機配置。
Refrigerant type is randomly configured by the factory.

產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.
II … 雙機頭 -2 … 2 門 -3 … 3 門

AOYIXING

-60°C 低溫

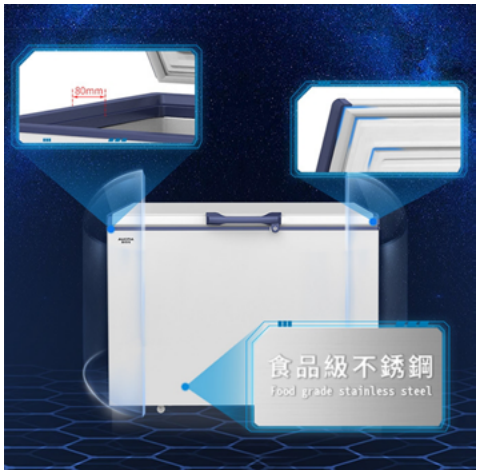

- ■ -60°C低溫、速凍
  -60 °c deep freezing and quick freezing
- ■ 精準控溫
  Degree precise temperature control
- ■ 精銅製程蒸發器
  Refined copper process evaporator
- ■ 雪櫃門階梯式膠邊，鎖住溫度不滲漏
  Step door lining, Locked in cold energy without leakage
- ■ 88mm 加厚泡棉層
  88mm thickened foam layer
- ■ 食品級不銹鋼
  Food grade stainless steel



DW/BD-60W192HE



DW/BD-60W302HE



DW/BD-60W420HE

澳意星超低溫卧式冷凍櫃 Aoyixing- Ultra-low Temperature Freezer

型號 Model	尺寸 – 濶 × 深 × 高 Dimensions – W × D × H (mm)	日耗電量 / 24h Energy Consumption (kWh)	有效容量 Validity Capacity (L)	温度範圍 Temperature range (°C)	冷凍系統 Cooling System	製冷劑 Refrigerant
DW/BD-60W192HE	964×608×866	0.95	192	-60 ~ -15	直冷 Static	R290
DW/BD-60W302HE	1094×692×905	1.36	302			
DW/BD-60W420HE	1523×689×848	1.58	420			



BC/BD-520SND



BC/BD-520SND

-40°C 低溫



澳意星卧式冷藏冷凍轉換櫃 Aoyixing- Chest Freezer

型號 Model	尺寸 – 濶 × 深 × 高 Dimensions – W × D × H (mm)	日耗電量 / 24h Energy Consumption (kWh)	有效容量 Validity Capacity (L)	温度範圍 Temperature range (°C)	冷凍系統 Cooling System	製冷劑 Refrigerant
BC/BD-520SND	1640×705×898	1.45	519	-40 ~ -10	直冷 Static	

⚠ 請保持地面清潔及乾爽。
Keep the floor clean and dry.

卧式冷凍櫃系列 CHEST FREEZER SERIES

產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.


AB-108


HF271


AB396


HF506

丹麥 VESTFROST 臥式冷凍櫃 VESTFROST Chest Freezer

型號 Model	尺寸 – 濶 × 深 × 高 Dimensions – W × D × H (mm)	溫度範圍 Temperature range (°C)	功率 Power (w)	有效容量 Validity Capacity (L)	冷凍系統 Cooling System	製冷劑 Refrigerant	其他 Others
AB108	550×550×825	-24 ~ -17	75	101	直冷 Static	R600a	可配吊籃 optional basket
AB396	1260×650×850	-24 ~ -17	145	362	直冷 Static	R600a	可配吊籃 optional basket
HF271	960×695×850	-24 ~ -18	130	206	直冷 Static	R600a	可配吊籃 optional basket
HF506	1560×695×850	-24 ~ -18	190	384	直冷 Static	R600a	可配吊籃 optional basket


趟玻璃門設計 Sliding Glass Door
IKG-505


VT-146 / VT-406

型號 Model	尺寸 – 濶 × 深 × 高 Dimensions – W × D × H (mm)	溫度範圍 Temperature range (°C)	功率 Power (w)	有效容量 Validity Capacity (L)	冷凍系統 Cooling System	製冷劑 Refrigerant	其他 Others
DGF405	1260×608×905	-19 ~ -16	300	307	直冷 Static	R600a	可配吊籃 optional basket
IKG275	920×608×905	-19 ~ -16	260	210	直冷 Static	R600a	可配吊籃 optional basket
IKG505	1560×608×905	-19 ~ -16	320	394	直冷 Static	R600a	可配吊籃 optional basket
VT146	725×605×885	-45 ~ -25	300	133	直冷 Static	R290	可配吊籃 optional basket
VT306	1265×605×885	-45 ~ -25	400	284	直冷 Static	R290	可配吊籃 optional basket
VT406	1562×605×885	-45 ~ -25	400	368	直冷 Static	R290	可配吊籃 optional basket
VT147	725×605×885	-60 ~ -40	360	133	直冷 Static	Nature R	可配吊籃 optional basket
VT307	1265×605×885	-60 ~ -40	360	284	直冷 Static	Nature R	可配吊籃 optional basket
VT407	1562×605×885	-60 ~ -40	360	368	直冷 Static	Nature R	可配吊籃 optional basket

⚠ 請保持地面清潔及乾爽。
Keep the floor clean and dry.

＊ 雪櫃內外溫差有機會做成玻璃門上水霧，純屬正常。
Temperature difference between ex/internal of the refrigerator may cause moisture on glass door(s), and this is normal.

產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.

MADE IN TAIWAN
台灣製造

特大風扇循環制冷系統
庫內降溫效果最均勻
Ventilated **C**ooling **S**ystem



- 全自動定時除霜
  Automatic Defrost
- 微電子數位式冷藏冷凍系統控制器
  Digital Controller with Temperature Display
- 可調整式置物網架
  Adjustable Shelves

雪櫃頂部請預留 300 mm 空間散熱
Allow at least 300 mm clearance from the ceiling.



RS-R1002F-1



RS-R1004F-1

台灣立式不銹鋼冷凍／冷藏櫃 Taiwanese Upright Stainless Steel Freezer / Refrigerator

型號 Model	尺寸－濶 × 深 × 高 Dimensions – W × D × H (mm)	溫度範圍 Temperature range (°C)	功率 Power (w)	有效容量 Validity Capacity (L)	櫃門 Doors	冷凍系統 Cooling System	制冷劑 Refrigerant
RS-R1002F-1	750×700×2040	-20 ~ -16	470	600	2	風冷 Ventilated	R404a
RS-R1009C-1	750×700×2040	+3 ~ +8	200	600	2	風冷 Ventilated	R134a
RS-R1004F-1	1200×700×2040	-20 ~ -16	750	960	4	風冷 Ventilated	R404a
RS-R1005C-1	1200×700×2040	+3 ~ +8	250	960	4	風冷 Ventilated	R134a

⚠ 雪櫃頂部請預留最少 300 mm 空間散熱。
Allow at least 300 mm clearance from the ceiling.

＊可訂造 800 mm 深。
Can be tailor-made 800 mm depth.

產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.

MADE IN TAIWAN
台灣製造



RS-T005C-1



RS-T006C-1

台灣不銹鋼工作台 Taiwanese Refrigerated Work Table

型號 Model	尺寸－濶 × 深 × 高 Dimensions – W × D × H (mm)	溫度範圍 Temperature range (°C)	功率 Power (w)	有效容量 Validity Capacity (L)	櫃門 Doors	冷凍系統 Cooling System	制冷劑 Refrigerant
RS-T004C-1	1200×600×805	+3 ~ +8	185	200	2	風冷 Ventilated	R134a
RS-T004F-1	1200×600×805	-10 ~ -5	185	200	2	風冷 Ventilated	R404a
RS-T005C-1	1500×600×805	+3 ~ +8	185	300	2	風冷 Ventilated	R134a
RS-T005F-1	1500×600×805	-10 ~ -5	470	300	2	風冷 Ventilated	R404a
RS-T006C-1	1800×600×805	+3 ~ +8	185	400	3	風冷 Ventilated	R134a
RS-T006F-1	1800×600×805	-10 ~ -5	470	400	3	風冷 Ventilated	R404a
RS-T007C-1	2100×600×805	+3 ~ +8	250	500	3	風冷 Ventilated	R134a
RS-T007F-1	2100×600×805	-10 ~ -5	560	500	3	風冷 Ventilated	R404a
RS-T008C-1	2400×600×805	+3 ~ +8	375	600	3	風冷 Ventilated	R134a
RS-T008F-1	2400×600×805	-10 ~ -5	560	600	3	風冷 Ventilated	R404a

＊ 可訂造右機頭。
Countertop customization

＊ 可訂造 750 mm 深。
Can be tailor-made 750 mm depth.

MADE IN TAIWAN
台灣製造

台灣玻璃門餐飲工作台
Taiwanese Refrigerated Work Table – Glass Door



RS-ST004
RS-ST005

RS-ST006

台灣冷藏抽屜式工作台
Taiwanese Refrigerated Base Work Table – Drawer Type



RS-TD005

型號 Model	尺寸－濶 × 深 × 高 Dimensions – W × D × H (mm)	溫度範圍 Temperature range (°C)	功率 Power (w)	有效容量 Validity Capacity (L)	櫃門 Doors	冷凍系統 Cooling System	制冷劑 Refrigerant
RS-ST004	1200×600×805	+3 ~ +8	190	200	2	風冷 Ventilated	R134a
RS-ST005	1500×600×805	+3 ~ +8	190	300	2	風冷 Ventilated	R134a
RS-ST006	1800×600×805	+3 ~ +8	190	400	3	風冷 Ventilated	R134a
RS-TD004	1200×600×805	+3 ~ +8	190	200	2 抽屜 Drawer	風冷 Ventilated	R134a
RS-TD005	1500×600×805	+3 ~ +8	190	300	4 抽屜 Drawer	風冷 Ventilated	R134a


＊ 可訂造右機頭。
Countertop customization.

＊ 可訂造 750 mm 深。
Can be tailor-made 750 mm depth.

＊ 可加 LED 櫃內照明。
Optional LED interior light.

產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.

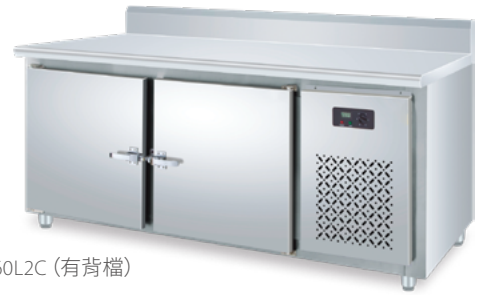


BD-260L2C (有背檔)



CF-528L2C(無背檔)

澳意星明管直冷工作台 Aoyixing Stainless Steel Exposed Pipes Static Work Table

型號 Model	尺寸 *1– 濶 × 深 × 高 Dimensions – W × D × H (mm)	溫度範圍 Temperature range (°C)	功率 Power (w)	有效容量 Validity Capacity (L)	櫃門 Doors	冷凍系統 Cooling System	制冷劑 *2 Refrigerant
CF-501L2C	1200×620×800 (935)	-12 ~ 0	161	200	2	明管直冷 Exposed Pipes Static	R134a / R290
BD-260L2C	1500×620×800 (935)	-12 ~ 0	161	250			
CF-300L2C (雙門)	1800×620×800 (935)	-12 ~ 0	215	300			
CF-528L2C	1500×800×800 (935)	-12 ~ 0	215	300			
CF-505L2C (雙門)	1800×800×800 (935)	-12 ~ 0	215	400			

*1 以上尺寸不包括門把。
Dimensions not include door handles.






BD-260L2C1 (有背檔)

＊ 可訂造玻璃門
Optional glass door(s).


CF-528L2C1 (無背檔)


澳意星不銹鋼暗管直冷工作台 Aoyixing Stainless Steel Hidden Pipes Static Work Table

型號 Model	尺寸 – 濶 × 深 × 高 Dimensions – W × D × H (mm)	溫度範圍 Temperature range (°C)	功率 Power (w)	有效容量 Validity Capacity (L)	櫃門 Doors	冷凍系統 Cooling System	制冷劑 *2 Refrigerant
CF-501L2C1	1200×620×800 (935)	-12 ~ 0	161	200	2	暗管直冷 Hidden Pipes Static	R134a / R290
BD-260L2C1	1500×620×800 (935)	-12 ~ 0	161	250			
CF-300L2C1 (雙門)	1800×620×800 (935)	-12 ~ 0	215	300			
CF-528L2C1	1500×800×800 (935)	-12 ~ 0	215	300			
CF-505L2C1 (雙門)	1800×800×800 (935)	-12 ~ 0	215	400			

＊ 有背檔高度為 (935)
Height of product with back panel is (935).

＊ 可訂造玻璃門
Optional glass door(s).





可度身訂造或改玻璃門
Custom Made, optional glass door(s)


G-750ML


G-900ML2 / G-1200ML2

澳意星不銹鋼冷櫃 Aoyixing Stainless Steel Freezer

型號 Model	尺寸 – 濶 × 深 × 高 Dimensions – W × D × H (mm)	溫度範圍 Temperature range (°C)	功率 Power (w)	有效容量 Validity Capacity (L)	櫃門 Doors	冷凍系統 Cooling System	制冷劑 *2 Refrigerant
G-540-1	540×610×845	-12 ~ 0	160	150	1	暗管直冷 Hidden Pipes Static	R134a / R290
G-610ML	760×610×845	-12 ~ 0	170	160			
G-750ML	760×710×845	-12 ~ 0	170	180			
CF-900-1	900×610×845	-12 ~ 0	195	250	2	暗管直冷 Hidden Pipes Static	R134a / R290
G-900ML2	900×710×845	-12 ~ 0	195	250			
CF-1200-1	1200×610×845	-12 ~ 0	215	305			
G-1200ML2	1200×710×845	-12 ~ 0	215	305			

＊ 可訂造玻璃門
Optional glass door(s).

＊ 雪櫃空載測試溫度 -18 ～ 0 ℃
No-load test for Freezer：-18 ～ 0 ℃

＊ 可度身訂造
Custom Made Refrigerator.

*2 新舊製冷劑種類由工廠隨機配置。
Refrigerant type is randomly configured by the factory.

產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.

C … 明管 C1 … 暗管 F … 風冷 S … 玻璃門 L2 … 2 門 L3 … 3 門 L4 … 4 門







HK-800L2C





HK-1000L4C

澳意星不銹鋼明管直冷冷凍／冷藏櫃 Aoyixing Stainless Steel Exposed Pipes Static Freezer / Refrigerator

型號 Model	尺寸 – 濶 × 深 × 高 Dimensions – W × D × H (mm)	溫度範圍 Temperature range (°C)	功率 Power (w)	有效容量 Validity Capacity (L)	櫃門 Doors	冷凍系統 Cooling System	制冷劑 *1 Refrigerant
HK-800L2C	760×710×1990	0~+10/-18~0	600	800	2	明管直冷 Exposed Pipes Static	R134a/ R290
HK-1000L4C	1220×710×1990	0~+10/-18~0	780	1000	4		

＊ 櫃頂散熱突出 50mm。Cooling element exceeds 50mm from top of the refrigerator.





■ 不銹鋼機身，堅固耐用
Stainless Steel Body Panels

■ 明管直冷，製冷快速
Exposed Pipes Static



CF-508L2C



CF-1000L4CB



CF-1600L6CB

澳意星不銹鋼直冷冷凍／冷藏櫃 Aoyixing Stainless Steel Freezer / Refrigerator

型號 Model	尺寸 *1 – 濶 × 深 × 高 Dimensions – W × D × H (mm)	溫度範圍 Temperature range (°C)	功率 Power (w)	有效容量 Validity Capacity (L)	櫃門 Doors	冷凍系統 Cooling System	制冷劑 *2 Refrigerant
CF-508L2C	625×700×1915	-12 ~ 0	215	508	2	明管直冷 Exposed Pipes Static	R134a/ R290
雙機雙溫							
CF-508L2CB	625×700×1915	-12 ~ 0 /+3 ~ +8	215	508	2	明管直冷 Exposed Pipes Static	R134a/ R290
CF-1000L4CB	1210×700×1915	-12 ~ 0 /+3 ~ +8	472	1000	4		
CF-1000L4CBW	1210×700×1915	-18 ~ -10	472	1000	4		
CF-1600L6CB	1805×700×1915	-12 ~ 0 /+3 ~ +8	550	1600	6		

*1 以上尺寸不包括門把。Dimensions not include door handles.



■ 不銹鋼機身，堅固耐用
Stainless Steel Body Panels

■ 暗管直冷，方便存放食物
Hidden Pipes Static



CF-508L2C1



CF-1000L4C1B



CF-1600L6C1B

型號 Model	尺寸 *1 – 濶 × 深 × 高 Dimensions – W × D × H (mm)	溫度範圍 Temperature range (°C)	功率 Power (w)	有效容量 Validity Capacity (L)	櫃門 Doors	冷凍系統 Cooling System	制冷劑 *2 Refrigerant
CF-508L2C1	625×700×1915	-12 ~ 0	215	508	2	暗管直冷 Hidden Pipes Static	R134a/ R290
雙機雙溫							
CF-508L2C1B	625×700×1915	-12 ~ 0 / +2 ~ +8	215	508	2	暗管直冷 Hidden Pipes Static	R134a/ R290
CF-1000L4C1B	1210×700×1915	-12 ~ 0 / +2 ~ +8	472	1000	4		
CF-1000L4C1BW	1210×700×1915	-18 ~ -10	472	1000	4		
CF-1600L6C1B	1805×700×1915	-12 ~ 0 / +2 ~ +8	550	1600	4		

⚠ 雪櫃頂部請預留最少 300 mm 空間散熱。
Allow at least 300 mm clearance from the ceiling.

*1 新舊製冷劑種類由工廠隨機配置。
Refrigerant type is randomly configured by the factory.

*2 以上尺寸不包括門把。
Dimensions not include door handles.

＊ 可訂造玻璃門
Optional glass door(s).

產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.

C … 明管 C1 … 暗管 F … 風冷 B … 雙機雙溫 2B … 單機雙溫 W … 超低溫 L2 … 2 門 L3 … 3 門 L4 … 4 門 L6 … 6 門 S … 玻璃門

雪櫃頂部請預留 300 mm 空間散熱
Allow at least 300 mm clearance from the ceiling.

AOYIXING 澳意星





節省能源 | 溫度調節 | 低噪音 | 自動蒸發

方向腳輪 | 斷電保溫 | 開門時風扇自動停止 | 方便清潔


ENG-5902LF



ENG-1180L4F / ENG-1300L4F

澳意星不銹鋼風冷工程櫃 Aoyixing Stainless Steel Ventilated Refrigerator / Freezer


型號 Model	尺寸－濶 × 深 × 高 Dimensions – W × D × H (mm)	溫度範圍 Temperature range (°C)	功率 Power (w)	有效容量 Validity Capacity (L)	制冷劑 *1 Refrigerant	櫃門 Doors	冷凍系統 Cooling System
ENG-590L2F-V ENG-590L2F-EV	700×760×1990	+3 ~ +8	390	387	R134a/ R290	2	翅片風冷 Ventilated
ENG-590L2F-W ENG-590L2F-EW	700×760×1990	-18 ~ -10	390	387	R404a/ R290	2	
ENG-1180L4F-V ENG-1180L4F-EV	1200×760×1990	+3 ~ +8	522	1100	R134a/ R290	4	翅片風冷 Ventilated
ENG-1180L4F-W ENG-1180L4F-EW	1200×760×1990	-18 ~ -10	522	1100	R404a/ R290	4	
ENG-1300L4F-V ENG-1300L4F-EV	1360×760×1990	+3 ~ +8	750	1300	R134a/ R290	4	翅片風冷 Ventilated
ENG-1300L4F-W ENG-1300L4F-EW	1360×760×1990	-18 ~ -10	750	1300	R404a/ R290	4	

*1 新舊製冷劑種類由工廠隨機配置。
Refrigerant type is randomly configured by the factory.


產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.



正面圖 Front View




側視圖 Profile Plane




俯視圖 Top View




ENG-500L2F



正面圖 Front View




側視圖 Profile Plane




俯視圖 Top View




ENG-520L2F



正面圖 Front View




側視圖 Profile Plane




俯視圖 Top View




ENG-540L2F



正面圖 Front View



側視圖 Profile Plane



俯視圖 Top View



ENG-540L3F

澳意星不銹鋼風冷工作台 Aoyixing Stainless Steel Ventilated Counter


型號 Model	尺寸 – 濶 × 深 × 高 Dimensions – W × D × H (mm)	溫度範圍 Temperature range (°C)	功率 Power (w)	有效容量 Validity Capacity (L)	櫃門 Doors	制冷劑 *1 Refrigerant	冷凍系統 Cooling System
ENG-500L2F-V	1200×630×800	+3 ~ +8	161	167	2	R134a / R290	翅片風冷 Ventilated
ENG-500L2F-W	1200×630×800	-18 ~ 0	161	167	2	R404a / R290	
ENG-520L2F-V	1500×630×800	+3 ~ +8	218	246	2	R134a / R290	翅片風冷 Ventilated
ENG-520L2F-W	1500×630×800	-18 ~ 0	218	246	2	R404a / R290	
ENG-530L2F-V	1800×630×800	+3 ~ +8	-	308	2	R134a / R290	翅片風冷 Ventilated
ENG-530L2F-W	1800×630×800	-18 ~ 0	-	308	2	R404a / R290	
ENG-530L3F-V	1800×630×800	+3 ~ +8	-	308	3	R134a / R290	翅片風冷 Ventilated
ENG-530L3F-W	1800×630×800	-18 ~ 0	-	308	3	R404a / R290	
ENG-540L2F-V	1800×760×800	+3 ~ +8	365	416	2	R134a / R290	翅片風冷 Ventilated
ENG-540L2F-W	1800×760×800	-18 ~ 0	365	416	2	R404a / R290	
ENG-540L3F-V	1800×760×800	+3 ~ +8	365	416	3	R134a / R290	翅片風冷 Ventilated
ENG-540L3F-W	1800×760×800	-18難 ~ 0	365	416	3	R404a / R290	

產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.


＊ 可訂造 2000 mm 濶。
Can be tailor-made 2000 mm width.

*1 新舊製冷劑種類由工廠隨機配置。
Refrigerant type is randomly configured by the factory.


雪櫃頂部請預留 300 mm 空間散熱
Allow at least 300 mm clearance from the ceiling.

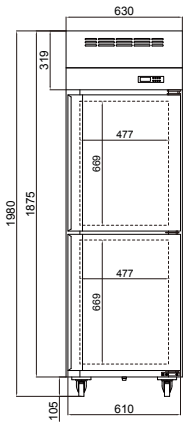

正面圖 Front View

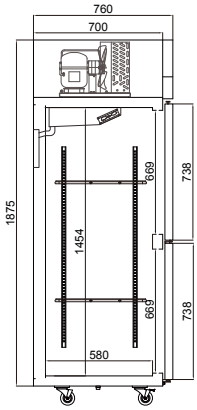


側視圖 Profile Plane




俯視圖 Top View



AGL-0.5L2FD/ AGL-0.5L2FC

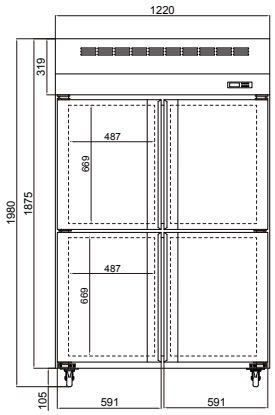

正面圖 Front View

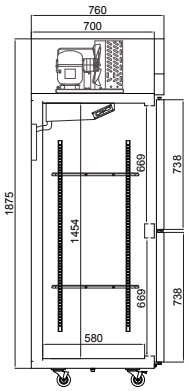


側視圖 Profile Plane




俯視圖 Top View



AGL-1.0L4FD/ AGL-1.0L4FC/
AGL-1.0L4FS

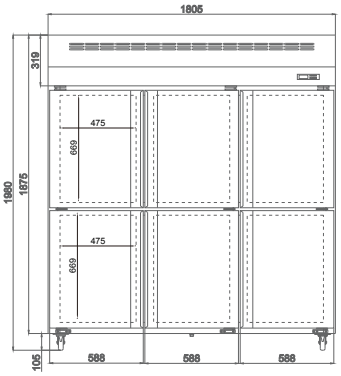

正面圖 Front View



側視圖 Profile Plane



俯視圖 Top View


AGL-1.6L6FD/ AGL-1.6L6FC/ AGL-1.6L6FS

澳意星不銹鋼冷凍 / 冷藏工程櫃 Aoyixing Stainless Steel Refrigerator / Freezer

型號 Model	尺寸 – 濶 × 深 × 高 Dimensions – W × D × H (mm)	溫度範圍 Temperature range (°C)	功率 Power (w)	有效容量 Validity Capacity (L)	櫃門 Doors	制冷劑 Refrigerant	冷凍系統 Cooling System
AGL-0.5L2FD	630×760×1980	-22~0	990	320	2	R290	翅片風冷 Ventilated
AGL-0.5L2FC	630×760×1980	+2 ~ +8	990	320	2	R290	
AGL-1.0L4FD	1220×760×1980	-22~0	1420	640	4	R290	翅片風冷 Ventilated
AGL-1.0L4FC	1220×760×1980	+2 ~ +8	1420	640	4	R290	
AGL-1.6L6FD	1805×760×1980	-22~0	2200	1100	6	R290	翅片風冷 Ventilated
AGL-1.6L6FC	1805×760×1980	+2 ~ +8	2200	1100	6	R290	
AGL-1.0L4FS (雙溫)	1220×760×1980	-22~0/ +2 ~ +8	1420	640	4	R290	翅片風冷 Ventilated
AGL-1.6L6FS (雙溫)	1805×760×1980		2200	1100	6	R290	

L1/L2/L3= 門數；F= 風冷；D= 冷凍；C= 冷藏；S= 雙溫

產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.


■ 不銹鋼摺抽手
Stainless steel folding handle

■ 不銹鋼面容易清潔打理
The stainless steel surface is easy to clean


■ 自動回彈門
Automatic rebound door

■ 可訂做玻璃門
Customizable glass door






正面圖 Front View




側視圖 Profile Plane




俯視圖 Top View



AGP-0.2L2FC/ AGP-0.2L2FD



正面圖 Front View




側視圖 Profile Plane




俯視圖 Top View



AGP-0.3L2FC/ AGP-0.3L2FD

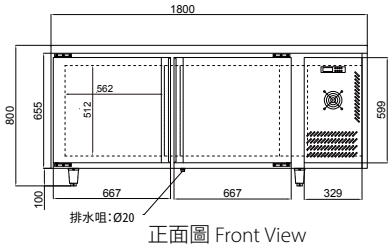

正面圖 Front View




側視圖 Profile Plane




俯視圖 Top View



AGP-0.4L2FC/ AGP-0.4L2FD

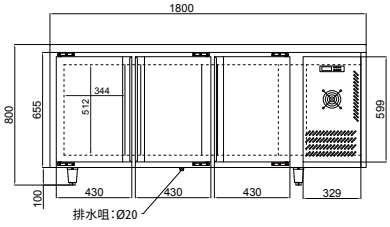

正面圖 Front View



側視圖 Profile Plane



俯視圖 Top View


AGP-0.4L3FC/ AGP-0.4L3FD

澳意星不銹鋼冷凍 / 冷藏工作台 Aoyixing Stainless Steel Freezer / Chiller Counter

型號 Model	尺寸 – 濶 × 深 × 高 Dimensions – W × D × H (mm)	溫度範圍 Temperature range (°C)	功率 Power (w)	有效容量 Validity Capacity (L)	櫃門 Doors	制冷劑 *1 Refrigerant	冷凍系統 Cooling System
AGP-0.2L2FD	1200×760×800	-22~0	400	165	2	R290	翅片風冷 Ventilated
AGP-0.2L2FC	1200×760×800	+2 ~ +8	400	165	2	R290	
AGP-0.3L2FD	1500×760×800	-22~0	550	220	2	R290	翅片風冷 Ventilated
AGP-0.3L2FC	1500×760×800	+2 ~ +8	550	220	2	R290	
AGP-0.4L2FD	1800×760×800	-22~0	660	295	2	R290	翅片風冷 Ventilated
AGP-0.4L2FC	1800×760×800	+2 ~ +8	660	295	2	R290	
AGP-0.4L3FD	1800×760×800	-22~0	660	295	3	R290	翅片風冷 Ventilated
AGP-0.4L3FC	1800×760×800	+2 ~ +8	660	295	3	R290	

L1/L2/L3= 門數；F= 風冷；D= 冷凍；C= 冷藏；S= 雙溫

產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.

Panasonic

雪櫃頂部請預留 300 mm 空間散熱
Allow at least 300 mm clearance from the ceiling.



SRR-681HP(E)
SRF-681HP(E)
SRR-781HP(E)
SRF-781HP(E)



SRR-1281HP(E)
SRF-1281HP(E)
SRR-1581HP(E)
SRF-1581HP(E)



SRR-1881HP(E)/SRF-1881HP(E)

日本樂聲不銹鋼冷凍 / 冷藏櫃 Panasonic Stainless Steel Freezer / Refrigerator

型號 Model	尺寸 – 濶 × 深 × 高 Dimensions – W × D × H (mm)	溫度範圍 Temperature range (°C)	功率 Power (w)	有效容量 Validity Capacity (L)	櫃門 Doors	制冷劑 Refrigerant
SRR-681HP(E)	620×800×2000	-6 ~ +12	375	483	2	R134a
SRF-681HP(E)	620×800×2000	-25 ~ -15	580	471	2	R404a
SRR-781HP(E)	745×800×2000	-6 ~ +12	380	610	2	R134a
SRF-781HP(E)	745×800×2000	-25 ~ -15	585	598	2	R404a
SRR-1281HP(E)	1210×800×2000	-6 ~ +12	740	1080	4	R134a
SRF-1281HP(E)	1210×800×2000	-25 ~ -15	1300	1080	4	R404a
SRR-1581HP(E)	1460×800×2000	-6 ~ +12	750	1329	4	R134a
SRF-1581HP(E)	1460×800×2000	-25 ~ -15	1300	1312	4	R404a
SRR-1881HP(E)	1800×800×2000	-6 ~ +12	795	1667	6	R134a
SRF-1881HP(E)	1800×800×2000	-25 ~ -15	1350	1650	6	R404a



SUR-1261HP(E) / SUF-1261HP(E)
SUR-1271HP(E) / SUF-1271HP(E)



SUR-1561HP(E) / SUF-1561HP(E)
SUR-1571HP(E)/ SUF-1571HP(E)



SUR-1861HP(E)
SUR-1871HP(E)
SUF-1871HP(E)

日本樂聲不銹鋼冷凍 / 冷藏工作台 Panasonic Stainless Steel Under Counter Freezer / Chiller

型號 Model	尺寸 – 濶 × 深 × 高 Dimensions – W × D × H (mm)	溫度範圍 Temperature range (°C)	功率 Power (w)	有效容量 Validity Capacity (L)	其他 Others	制冷劑 Refrigerant
SUR-1261HP(E)	1200×600×800	-6 ~ +12	380	214	2	R134a
SUF-1261HP(E)	1200×600×800	-25 ~ -15	400	214	2	R404a
SUR-1271HP(E)	1200×750×800	-6 ~ +12	380	280	2	R134a
SUF-1271HP(E)	1200×750×800	-25 ~ -15	400	280	2	R404a
SUR-1561HP(E)	1500×600×800	-6 ~ +12	390	296	2	R134a
SUF-1561HP(E)	1500×600×800	-25 ~ -15	585	296	2	R404a
SUR-1571HP(E)	1500×750×800	-6 ~ +12	390	393	2	R134a
SUF-1571HP(E)	1500×750×800	-25 ~ -15	585	296	2	R404a
SUR-1861HP(E)	1800×600×800	-6 ~ +12	410	377	3	R134a
SUR-1871HP(E)	1800×750×800	-6 ~ +12	410	495	3	R134a
SUF-1871HP(E)	1800×750×800	-25 ~ -15	600	495	3	R404a

產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.

雪櫃頂部請預留 300 mm 空間散熱
Allow at least 300 mm clearance from the ceiling.



HR-76MA-S/ HR78MA-S
HF-76MA-S/ HF-78MA-S
HRF-78MB-S



HR-126MA-S / HR-128MA-S
HF-126MA-S/ HF-128MA-S
HRF-128MA-S



HR-146MA-S / HR-148MA-S
HF-146MA-S/ HF-148MA-S
HRF-148MA-S



HR-188MA-S / HF-188MA-S
HRF-188MA-S

日本星崎銀星立式系列 Hoshizaki A-FIT Upright Series

型號 Model	尺寸 – 濶 × 深 × 高 Dimensions – W × D × H (mm)	溫度範圍 Temperature range (°C)	功率 Power (w)	有效容量 Validity Capacity (L)	制冷劑 Refrigerant	櫃門 Doors
HR-76MA-S / HR-78MA-S	700×650 / 800×(1900+100)	-2 ~ +12 / -6 ~ +12	237 / 386	467 / 569	R134a	2
HF-76MA-S / HF-78MA-S	700×650 / 800×(1900+100)	-23 ~ -7	426 / 469	467 / 569	R404a	2
HR-126MA-S / HR-128MA-S	1200×650 / 800×(1900+100)	-2 ~ +12 / -6 ~ +12	343 / 415	866 / 1053	R134a	4
HF-126MA-S / HF-128MA-S	1200×650 / 800×(1900+100)	-23 ~ -7	696 / 700	856 / 1047	R404a	4
HR-146MA-S / HR-148MA-S	1400×650 / 800×(1900+100)	-2 ~ +12 / -6 ~ +12	343 / 412	1021 / 1243	R134a	4
HF-146MA-S / HF-148MA-S	1400×650 / 800×(1900+100)	-23 ~ -7	696 / 740	1011 / 1233	R404a	4
HR-188MA-S	1800× 800×(1900+100)	-2 ~ +12 / -6 ~ +12	433	1632	R134a	6
HF-188MA-S	1800× 800×(1900+100)	-23 ~ -7	917	1622	R404a	6
雙溫 Dual Temperature						
HRF-78MB -S	700×800×(1900+100)	-2 ~ +12 / -23 ~ -7	478	540 R:260 F:280	R134a | R404a	2
HRF-128MA-S	1200×800×(1900+100)	-6 ~ +12 / -23 ~ -7	727	862 R:431 F:431	R134a | R404a	4
HRF-148MA-S	1400×800×(1900+100)	-6 ~ +12 / -23 ~ -7	808	1054 R:527 F:527	R134a | R404a	4
HRF-188MA-S	1800×800×(1900+100)	-6 ~ +12 / -23 ~ -7	844	1452 R:980 F:472	R134a | R404a	6



RT-96MA-S/ RT-98MA-S
FT-96MA-S/ FT-98MA-S



RT-126MA-S/ RT-128MA-S
FT-126MA-S/ FT-128MA-S
RT-156MA-S/ RT-158MA-S
FT-156MA-S/ FT-158MA-S



RT-186MA-S/ RT-188MA-S
FT-186MA-S/ FT-188MA-S

日本星崎銀星平台式系列 Hoshizaki A-FIT Counter Series

型號 Model	尺寸 – 濶 × 深 × 高 Dimensions – W × D × H (mm)	溫度範圍 Temperature range (°C)	功率 Power (w)	有效容量 Validity Capacity (L)	制冷劑 Refrigerant	櫃門 Doors
RT-96MA-S / RT-98MA-S	900×600 / 750×(700+100)	-6 ~ +12	240 / 240	151 / 199	R134a	1
FT-96MA-S / FT-98MA-S	900×600 / 750×(700+100)	-23 ~ -7	415 / 420	151 / 199	R404a	1
RT-126MA-S/ RT-128MA-S	1200×600 / 750×(700+100)	-6 ~ +12	245 / 245	231 / 307	R134a	2
FT-126MA-S / FT-128MA-S	1200×600 / 750×(700+100)	-23 ~ -7	410 / 418	231 / 307	R404a	2
RT-156MA-S / RT-158MA-S	1500×600 / 750×(700+100)	-6 ~ +12	260 / 260	318 / 420	R134a	2
FT-156MA-S / FT-158MA-S	1500×600 / 750×(700+100)	-23 ~ -7	415 / 415	318 / 420	R404a	2
RT-186MA-S / RT-188MA-S	1800×600 / 750×(700+100)	-6 ~ +12	280 / 280	401 / 502	R134a	3
FT-186MA-S / FT-188MA-S	1800×600 / 750×(700+100)	-23 ~ -7	400 / 400	401 / 502	R404a	3

＊ 電源：單相 /220V/50Hz
Power Supply: Single phrase/ 220V/ 50Hz

產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.

雪櫃頂部請預留 300 mm 空間散熱
Allow at least 300 mm clearance from the ceiling.



可選配玻璃門
GLASS DOOR OPTIONS



可放置 GN 盤系列
GN Series
HRE-70B-GN-SHD
HFE-70B-GN-SHD



HRE-67B-SHD
HFE-67B-SHD
HRE-77B-SHD
HFE-77B-SHD
HRFE-77B-SHD



HRE-127B-SHD
HFE-127B-SHD
HRE-147B-SHD
HFE-147B-SHD



HRE-187B-SHD
HFE-187B-SHD

日本星崎金星立式系列 Hoshizaki Goldline Upright Series

型號 Model	尺寸 – 濶 × 深 × 高 Dimensions – W × D × H (mm)	溫度範圍 Temperature range (°C)	功率 Power (w)	有效容量 Validity Capacity (L)	制冷劑 Refrigerant	櫃門 Doors
HRE-67B-SHD	625×800×(1900+100)	-6 ~ +12	317	507	R134a	2
HFE-67B-SHD	625×800×(1900+100)	-25 ~ -7	572	507	R404a	2
HRE-77B-SHD	700×800×(1900+100)	-6 ~ +12	348	599	R134a	2
HFE-77B-SHD	700×800×(1900+100)	-25 ~ -7	572	599	R404a	2
HRE-127B-SHD	1200×800×(1900+100)	-6 ~ +12	501	1109	R134a	4
HFE-127B-SHD	1200×800×(1900+100)	-25 ~ -7	723	1102	R404a	4
HRE-147B-SHD	1400×800×(1900+100)	-6 ~ +12	501	1311	R134a	4
HFE-147B-SHD	1400×800×(1900+100)	-25 ~ -7	723	1304	R404a	4
HRE-187B-SHD	1800×800×(1900+100)	-6 ~ +12	501	1720	R134a	6
HFE-187B-SHD	1800×800×(1900+100)	-25 ~ -7	723	1713	R404a	6
可放 GN 盤系列 GN Series (可容纳 2/1 GN 盤 Accommodate 2/1 GN Pan)						
HRE-70B-GN-SHD	700×850×(1900+100)	-6 ~ +12	443	630	R134a	2
HFE-70B-GN-SHD	700×850×(1900+100)	-25 ~ -7	572	630	R404a	2
雙溫 Dual Temperature						
HRFE-77B-SHD	700×800×(1900+100)	-6 ~ +12 | -25 ~ -7	439	260|282	R134a|R404a	2

RTC-90SNA
RTC-90SDA
FTC-90SNA
FTC-90SDA



RTC-120SNA
RTC-120SDA
FTC-120SNA
FTC-120SDA
RTC-150SNA
RTC-150SDA
FTC-150SNA
FTC-150SDA



RTC-180SNA
RTC-180SDA
FTC-180SNA
FTC-180SDA



日本星崎金星平台式系列 Hoshizaki Goldline Counter Series

型號 Model	尺寸 – 濶 × 深 × 高 Dimensions – W × D × H (mm)	溫度範圍 Temperature range (°C)	功率 Power (w)	有效容量 Validity Capacity (L)	制冷劑 Refrigerant	櫃門 Doors
RTC-90SNA RTC-90SDA	900×600×(700+100) 900×750×(700+100)	-6 ~ +12	175 174	122 159	R134a	1
FTC-90SNA FTC-90SDA	900×600×(700+100) 900×750×(700+100)	-25 ~ -7	349	122 159	R404a	1
RTC-120SNA RTC-120SDA	1200×600×(700+100) 1200×750×(700+100)	-6 ~ +12	198	188 247	R134a	2
FTC-120SNA FTC-120SDA	1200×600×(700+100) 1200×750×(700+100)	-25 ~ -7	403 408	188 247	R404a	2
RTC-150SNA RTC-150SDA	1500×600×(700+100) 1500×750×(700+100)	-6 ~ +12	271	258 337	R134a	2
FTC-150SNA FTC-150SDA	1500×600×(700+100) 1500×750×(700+100)	-25 ~ -7	473 543	258 337	R404a	2
RTC-180SNA RTC-180SDA	1800×600×(700+100) 1800×750×(700+100)	-6 ~ +12	314	324 424	R134a	3
FTC-180SNA FTC-180SDA	1800×600×(700+100) 1800×750×(700+100)	-25 ~ -7	582	324 424	R404a	3

* 型號 SNA 深度為 600 mm、型號 SDA 深度為 750 mm . Model SNA depth is 600 mm, Model SDA depth is 750 mm
* 電源：單相 /220V/50Hz . Power Supply: Single phrase/ 220V/ 50Hz

產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.

雪櫃頂部請預留 300 mm 空間散熱
Allow at least 300 mm clearance from the ceiling.



無中柱設計 Pillarless Design

令內部空間增大，容易擺放。
Enable loading of large size pans and trays easily.



HR-128MA-S-ML-J
HF-128MA-S-ML-J



HR-148MA-S-ML-J
HF-148MA-S-ML-J



HRE-127B-SHD-ML
HFE-127B-SHD-ML
HR-128MA-S-ML-J
HF-128MA-S-ML-J



HRE-147B-SHD-ML
HFE-147B-SHD-ML
HR-148MA-S-ML-J
HF-148MA-S-ML-J



HRE-187B-SHD-ML
HFE-187B-SHD-ML

日本星崎銀星立式無中柱背部化水系列 Hoshizaki A-Fit Upright Pillarless + Back Side Evaporator Series

型號 Model	尺寸－濶 × 深 × 高 Dimensions – W × D × H (mm)	溫度範圍 Temperature range (°C)	功率 Power (w)	有效容量 Validity Capacity (L)	製冷劑 Refrigerant	櫃門 Doors
HR-78MA-S-ML-J	700×800×(1900+100)	-6 ~ +12	446	569	R134a	4
HF-78MA-S-ML-J	700×800×(1900+100)	-23 ~ -7	649	569	R404a	4
HR-128MA-S-ML-J	1200×800×(1900+100)	-2 ~ +12	626	1053	R134a	4
HF-128MA-S-ML-J	1200×800×(1900+100)	-23 ~ -7	906	1047	R404a	4
HR-148MA-S-ML-J	1400×800×(1900+100)	-2 ~ +12	541	1243	R134a	4
HF-148MA-S-ML-J	1400×800×(1900+100)	-23 ~ -7	904	1243	R404a	4

日本星崎金星立式無中柱系列 Hoshizaki Goldine Upright Pillarless Series

型號 Model	尺寸－濶 × 深 × 高 Dimensions – W × D × H (mm)	溫度範圍 Temperature range (°C)	功率 Power (w)	有效容量 Validity Capacity (L)	製冷劑 Refrigerant	櫃門 Doors
HRE-127B-SHD-ML	1200×800×(1900+100)	-6 ~ +12	520	1109	R134a	4
HFE-127B-SHD-ML	1200×800×(1900+100)	-25 ~ -7	759	1102	R404a	4
HRE-147B-SHD-ML	1400×800×(1900+100)	-6 ~ +12	539	1218	R134a	4
HFE-147B-SHD-ML	1400×800×(1900+100)	-25 ~ -7	835	1205	R404a	4
HRE-187B-SHD-ML	1800×800×(1900+100)	-6 ~ +12	549	1600	R134a	6
HFE-187B-SHD-ML	1800×800×(1900+100)	-25 ~ -7	904	1600	R404a	6

＊ 電源：單相 /220V/50Hz
Power Supply: Single phrase/ 220V/ 50Hz

產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.



RT-126MA-S-ML
RT-128MA-S-ML
FT-126MA-S-ML
FT-128MA-S-ML



RT-156MA-S-ML
RT-158MA-S-ML
FT-156MA-S-ML
FT-158MA-S-ML



RT-186MA-S-ML
RT-188MA-S-ML
FT-186MA-S-ML
FT-188MA-S-ML



RTC-120SDA-ML
RTC-120SNA-ML
FTC-120SDA-ML
FTC-120SNA-ML



RTC-150SDA-ML
RTC-150SNA-ML
FTC-150SDA-ML
FTC-150SNA-ML



RTC-180SDA-ML
RTC-180SNA-ML
FTC-180SDA-ML
FTC-180SNA-ML

日本星崎銀星平台式無中柱系列 Hoshizaki A-Fit Counter Pillarless Series


型號 Model	尺寸－濶 × 深 × 高 Dimensions – W × D × H (mm)	溫度範圍 Temperature range (°C)	功率 Power (w)	有效容量 Validity Capacity (L)	製冷劑 Refrigerant	櫃門 Doors
RT-126MA-S-ML	1200×600×(700+100)	-6~ +12	245	231	R134a	2
RT-128MA-S-ML	1200×750×(700+100)			307		
FT-126MA-S-ML	1200×600×(700+100)	-23 ~ -7	418	231	R404a	2
FT-128MA-S-ML	1200×750×(700+100)		410	307		
RT-156MA-S-ML	1500×600×(700+100)	-6 ~ +12	260	318	R134a	2
RT-158MA-S-ML	1500×750×(700+100)			420		
FT-156MA-S-ML	1500×600×(700+100)	-23 ~ -7	415	318	R404a	2
FT-158MA-S-ML	1500×750×(700+100)			420		
RT-186MA-S-ML	1800×600×(700+100)	-6 ~ +12	280	401	R134a	3
RT-188MA-S-ML	1800×750×(700+100)			502		
FT-186MA-S-ML	1800×600×(700+100)	-23 ~ -7	400	401	R404a	3
FT-188MA-S-ML	1800×750×(700+100)			502		

日本星崎金星平台式無中柱系列 Hoshizaki Goldine Counter Pillarless Series

型號 Model	尺寸－濶 × 深 × 高 Dimensions – W × D × H (mm)	溫度範圍 Temperature range (°C)	功率 Power (w)	有效容量 Validity Capacity (L)	製冷劑 Refrigerant	櫃門 Doors
RTC-120SNA-ML	1200×600×(700+100)	-6 ~ +12	206	188	R134a	2
RTC-120SDA-ML	1200×750×(700+100)			301		
FTC-120SNA-ML	1200×600×(700+100)	-25 ~ -7	406	188	R404a	2
FTC-120SDA-ML	1200×750×(700+100)		411	301		
RTC-150SNA-ML	1500×600×(700+100)	-6 ~ +12	279	313	R134a	2
RTC-150SDA-ML	1500×750×(700+100)			413		
FTC-150SNA-ML	1500×600×(700+100)	-25 ~ -7	476	258	R404a	2
FTC-150SDA-ML	1500×750×(700+100)		546	337		
RTC-180SNA-ML	1800×600×(700+100)	-6 ~ +12	322	398	R134a	3
RTC-180SDA-ML	1800×750×(700+100)			524		
FTC-180SNA-ML	1800×600×(700+100)	-25 ~ -7	585	324	R404a	3
FTC-180SDA-ML	1800×750×(700+100)			524		

＊ 電源：單相 /220V/50Hz . Power Supply: Single phrase/ 220V/ 50Hz

產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.



可容納 1/1 GN 盤
Accommodate 1/1 GN Pan



RTC-90DDA-GN-3D



RTC-125DDA-GN-4D



RTC-167DDA-GN-6D

日本星崎金星平台抽屜式系列 Hoshizaki Goldline Counter Drawer Series

型號 Model	尺寸－濶 × 深 × 高 Dimensions – W ×D×H (mm)	溫度範圍 Temperature range (°C)	功率 Power (w)	有效容量 Validity Capacity (L)	製冷劑 Refrigerant	抽屜 Drawers
RTC-90DDA-GN-3D	900×750×(700+100)	-6 ~ +12	243	176	R134a	3
RTC-125DDA-GN-4D	1250×750×(700+100)	-6 ~ +12	315	296	R134a	4
RTC-167DDA-GN-6D	1670×750×(700+100)	-6 ~ +12	315	443	R134a	6



RTL-108MA-SD
FTL-108MA-SD



RTL-148MA-SD
FTL-148MA-SD



RTL-188MA-SD
FTL-188MA-SD

日本星崎銀星平台抽屜式系列 Hoshizaki A-FIT Undercounter Drawer Series

型號 Model	尺寸－濶 × 深 × 高 Dimensions – W ×D×H (mm)	溫度範圍 Temperature range (°C)	功率 Power (w)	有效容量 Validity Capacity (L)	製冷劑 Refrigerant	抽屜 Drawers
RTL-108MA-SD	980×750×(470+100)	-6 ~ +12	304	85	R134a	2
FTL-108MA-SD	980×750×(470+100)	-23 ~ -7	376	85	R404a	2
RTL-148MA-SD	1400×750×(470+100)	-6 ~ +12	324	176	R134a	4
FTL-148MA-SD	1400×750×(470+100)	-23 ~ -7	476	176	R404a	4
RTL-188MA-SD	1820×750×(470+100)	-6 ~ +12	257	267	R134a	6
FTL-188MA-SD	1820×750×(470+100)	-23 ~ -7	418	267	R404a	6

■ 自動除霜系統
Smart auto-defrost system

■ LED 櫃內照明
LED interior lighting

■ 玻璃趟門
Sliding Door



RT-126MA-SSG
RT-128MA-SSG



RT-156MA-SSG
RT-158MA-SSG



RT-186MA-SSG
RT-188MA-SSG

日本星崎銀星平台玻璃趟門系列 A-FIT Sliding Glass Door Counter Series

型號 Model	尺寸－濶 × 深 × 高 Dimensions – W ×D×H (mm)	溫度範圍 Temperature range (°C)	功率 Power (w)	有效容量 Validity Capacity (L)	製冷劑 Refrigerant	趟門 Sliding Door
RT-126MA-SSG	1200×600×(700+100)	-2 ~ +12	295	231	R134a	2
RT-128MA-SSG	1200×750×(700+100)			307		2
RT-156MA-SSG	1500×600×(700+100)	-2 ~ +12	315	318	R134a	2
RT-158MA-SSG	1500×750×(700+100)			402		2
RT-186MA-SSG	1800×600×(700+100)	-2 ~ +12	315	401	R134a	3
RT-188MA-SSG	1800×750×(700+100)			502		3

產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.

＊ 電源：單相 /220V/50Hz
Power Supply: Single phrase/ 220V/ 50Hz

MADE IN ITALY
意大利製造

■ 感溫器 Core probe
■ R452a 製冷劑 R452a Refrigerant


ASP033EVF


ASP05HGB


ASP08HGB / ASP10HGB
ASP10SHGB


ASP15HGB

意大利 VENIX ASPEN 速凍櫃 VENIX ASPEN BLAST CHILLER

型號 Model	烤盤盤數 Load capacity (trays)	尺寸 – 濶 × 深 × 高 Dimensions – W ×D×H (mm)	托盤間距 Trays spacing (mm)	冷卻能力 Capacity per cycle	電壓 Voltage(V)	功率 Power (w)	制冷量 * Cooling capacity (w)
ASP033EVF	3 盤 (可放 GN 2/3 盤)	655×640×460	85	10 kg +90° → +3° 6 kg +90° → -18°za	220	500	730
ASP05HGB	5 盤 (可放 GN 1/1 盤 或 600×400 – 650×450 烤盤)	840×830×900	68	20 kg +90° → +3° 13 kg +90° → -18°	220	1500	1870
ASP08HGB	8 盤 (可放 GN 1/1 盤 或 600×400 – 650×450 烤盤)	870×870×1555	74	35 kg +90°->+3° 20 Kg +90°-> -18°	230	2195	3000
ASP10SHGB	10 盤 (可放 GN 1/1 盤 或 600×400 – 650×450 烤盤)	870×870×1555	74	35 kg +90° → +3° 20 kg +90° → -18°	230	2195	3000
ASP10HGB	10 盤 (可放 GN 1/1 盤 或 600×400 – 650×450 烤盤)	870×870×1555	74	40 kg +90°Ò+3° 25 kg +90°Ò-18°	400	3500	4767
ASP15HGB	15 盤 (可放 GN 1/1 盤 或 600×400 – 650×450 烤盤)	870×870×1905	70	60 kg +90° → +3° 40 kg +90° → -18°	400	3500	4767

* Evap -10°, Cond. 45

MADE IN TAIWAN
台灣製造

雪櫃頂部請預留 300 mm 空間散熱
Allow at least 300 mm clearance from the ceiling.

■ 不鏽鋼箱體 + 鋁製把手
Stylish stainless steel exterior with aluminum handle

■ 電子溫控
Digital control panel

■ 自動除霜
Automatic de-frost

■ 半自動回歸門
Centripetal type door closure

■ 創新效能式急速蒸發器
Innovative evaporator compartment design with DC motor


蒸發器
Evaporator compartment



數字溫控面板
Digital controller panel


RS-R9085BF

台灣急速冷凍庫 Taiwanese Blast Freezer

型號 Model	尺寸 – 濶 × 深 × 高 Dimensions – W ×D×H (mm)	溫度範圍 Temperature range (°C)	功率 Power (w)	有效容量 Validity Capacity (L)	冷凍系統 Cooling System	製冷劑 Refrigerant	層架 Shelves
RS-R9085BF	900×900×2040	-45 ~ -40	1120	530	風冷 Ventilated	R134a	4

產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.

台灣圓角蛋糕展示櫃
Curve glass Confectionery Showcase



RS-C1005PRS

桌上型蛋糕櫃
Table top Showcase



RS-C9002
RS-C9003

直角蛋糕展示櫃
Confectionery Showcase



RS-C1005SQ

MADE IN TAIWAN
台灣製造



RS-C1005S

C-01 C-02 C-03 C-04 C-05 C-06 C-07

台灣蛋糕展示櫃 Taiwanese Confectionery Showcase

型號 Model	尺寸 – 濶 × 深 × 高 Dimensions – W × D × H (mm)	溫度範圍 Temperature range (°C)	功率 Power (w)	玻璃層板 Glass Shelves	冷凍系統 Cooling System	製冷劑 Refrigerant
RS-C1004PRS	1180×700×1210	+3 ~ +8	375	2	風冷 Ventilated	R134a
RS-C1005PRS	1480×730×1210	+3 ~ +8	750	2		
RS-C9002	900×465×660	+3 ~ +8	125	1	風冷 Ventilated	R134a
RS-C9003	900×465×880	+3 ~ +8	188	2		
RS-C1003SQ	890×685×1220	+3 ~ +8	375	2	風冷 Ventilated	R134a
RS-C1004SQ	1190×685×1220	+3 ~ +8	375	2		
RS-C1005SQ	1490×685×1220	+3 ~ +8	750	2		
RS-C1004S	1190×720×1795	+3 ~ +8	375	4	風冷 Ventilated	R134a
RS-C1005S	1490×720×1795	+3 ~ +8	750	4		

arneg KOREA

KOREA IMPORTED 韓國進口



PANINI DUO



PANINI S.FD



PANINI COMBO

韓國 ARNEG PANINI 蛋糕展示櫃 ARNEG PANINI Cake Display Showcase

型號 Model	尺寸 – 濶 × 深 × 高 Dimensions – W × D × H (mm)	溫度範圍 Temperature range (°C)	有效容量 Validity Capacity (L)	功率 Power (w)	製冷劑 Refrigerant	其他 Others
PANINI DUO 1500	1500×750×1300	L: 飲品區 +2 ~ +8 R: 甜品區 +5 ~ +10	352	1650	R404A	2 壓縮機 2 Compressor
PANINI DUO 1600	1600×750×1300		377	1900		
PANINI DUO 1800	1800×750×1300		428	2070		
PANINI S.FD 900	900×650×1400	+5 ~ +10	215	850	R404A	2 推拉門 2 Sliding Door
PANINI S.FD 1200	1200×650×1400		289	1010		
PANINI S.FD 1500	1500×650×1400		362	1200		
PANINI S.FD 1800	1800×650×1400		436	1460		
PANINI COMBO 1200	1200×750×1450	+5 ~ +10	326	2370	R404A	2 壓縮機 2 Compressor
PANINI COMBO 1300	1300×750×1450		353	2510		
PANINI COMBO 1800	1800×750×1450		408	2660		

⚠ 請避免陽光直射和遠離熱源，環境溫度不能高於 28° C，或有可能影響製冷效果。
Please avoid direct sunlight and heat sources. The ambient temperature cannot be higher than 28° C, which may affect the cooling effect.

產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.

提供優質及專業的商用冷凍設備
為高級餅店及酒店設計訂造
Best Quality & Professional Services



SCLG4-670FK4



SCLG4-520FK4



SCLG4-520FK4-SS




鋁製門欄
(Aluminum door rail)
路軌由鋁和塑膠製成，具有高耐磨性，可防止冷空氣流失。



觸摸式電氣連接
(Door-touch style electrical connected)
門觸摸式電氣連接的兩個金屬點，門上有加熱絲。




帶加熱絲的 3 層玻璃
(3 layers glass with heating wires)
玻璃由 3 層玻璃製成，內部有加熱絲，具有冷凝功能。



顏色選擇
(Color option)
有大理石 / 不銹鋼 / 木紋可供選擇。



門鎖過濾器
(Door lock fillister)
如果冷空氣洩漏，門將不會用鎖過濾器返回。



LED 燈照明
(LED lamp)
節能環保，為內部空間創造出色的照明效果。



尼龍無生鏽車輪
(Sliding door with nylon wheels)
帶尼龍輪的滑動門，光滑，耐磨，不生鏽。



空氣高效對流
(High efficiency air ventilation)
空氣高效流通，保證機器壽命。

直角形蛋糕展示櫃 Square Showcase


型號 Model	尺寸 – 濶 × 深 × 高 Dimensions – W × D × H (mm)	温度範圍 Temperature range (°C)	功率 Power (w)	容量 Capacity (L)	冷凍系統 Cooling System	製冷劑 Refrigerant
SCLG4-520FK4	1200×700×1350	+2 ~ +8	900	500	風冷 Ventilated	R134a
SCLG4-670FK4	1500×700×1350	+2 ~ +8	1000	640	風冷 Ventilated	R134a
SCLG4-800FK4	1800×700×1350	+2 ~ +8	1120	770	風冷 Ventilated	R134a
SCLG4-890FK4	2000×700×1350	+2 ~ +8	1220	850	風冷 Ventilated	R134a
SCLG4-900FK4	2400×700×1350	+2 ~ +8	1220	850	風冷 Ventilated	R134a

⚠ 請避免陽光直射和遠離熱源，環境溫度不能高於 28° C，或有可能影響製冷效果。
Please avoid direct sunlight and heat sources. The ambient temperature cannot be higher than 28° C, which may affect the cooling effect.

產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.



HG-320FC

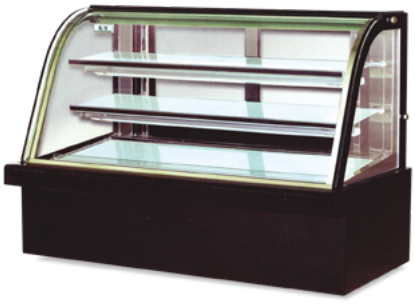

HG-420FC



Q3-15MF

大理石蛋糕展示櫃 Confectionery Showcase

型號 Model	尺寸 – 濶 × 深 × 高 Dimensions – W ×D×H (mm)	溫度範圍 Temperature range (°C)	功率 Power (w)	冷凍系統 Cooling System	製冷劑 *1 Refrigerant
HG-220FC	900×730×1200	+4 ~ +8	700	風冷 Ventilated	R134a / R290
HG-320FC	1200×730×1200	+4 ~ +8	700		
HG-420FC	1500×730×1200	+4 ~ +8	900		
HG-520FC	1800×730×1200	+4 ~ +8	1000		
Q3-12MF	1200×930×1600	+5 ~ +10	900	風冷 Ventilated	R134a/ R290
Q3-15MF	1500×930×1600	+5 ~ +10	1100		

＊ 以上產品另有尺寸 (深 730 mm) 可以訂造。
Can be tailor made (D 730 mm).

*1 新舊製冷劑種類由工廠隨機配置。
Refrigerant type is randomly configured by the factory.

- 高品質壓縮機，製冷快速
  High Quality Compressors
- 不銹鋼出風口
  Stainless Steel Air Outlet
- 內置自動蒸發水盤免倒水
  Water Evaporation System
- LED 照明
  Internal LED lighting.



不銹鋼出風口



HG-222BFB



HG-322BFB



HG-220FA

西餅展示櫃 Confectionery Showcase

型號 Model	尺寸 – 濶 × 深 × 高 Dimensions – W ×D×H (mm)	溫度範圍 Temperature range (°C)	功率 Power (w)	製冷劑 *1 Refrigerant	冷凍系統 Cooling System	其他 Others
HG-222BFB	900×600×1200	+4 ~ +8	620	R134a / R290	風冷 Ventilated	大理石 / 不銹鋼 Marble Panel / Stainless Steel
HG-322BFB	1200×600×1200	+4 ~ +8	650			
HG-422BFB	1500×600×1200	+4 ~ +8	900			
HG-522BFB	1800×600×1200	+4 ~ +8	1000			
HG-220FA	900×730×1200	+4 ~ +8	700	R134a / R290	風冷 Ventilated	大理石 / 不銹鋼 Marble Panel / Stainless Steel
HG-320FA	1200×730×1200	+4 ~ +8	700			
HG-420FA	1500×730×1200	+4 ~ +8	900			
HG-520FA	1800×730×1200	+4 ~ +8	1000			

＊ 以上產品另有尺寸可以訂造。
Can be tailor made.

*1 新舊製冷劑種類由工廠隨機配置。
Refrigerant type is randomly configured by the factory.

抽屜式蛋糕展示櫃 Sliding Drawer Cake Display Showcase

型號 Model	尺寸 – 濶 × 深 × 高 Dimensions – W ×D×H (mm)	溫度範圍 Temperature range (°C)	功率 Power (w)	抽屜門 Slidung Door
LDS-1200D-S	1200×700×1200	+2 ~ +8	1200	2
LDS-1500D-S	1500×700×1200		1500	2
LDS-1800D-S	1800×700×1200		1800	3




LDS-1200D-S/ LDS-1500D-S/ LDS-1800D-S


⚠ 請避免陽光直射和遠離熱源，環境溫度不能高於 28° C，或有可能影響製冷效果。
Please avoid direct sunlight and heat sources. The ambient temperature cannot be higher than 28° C, which may affect the cooling effect.

產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.


手動恆溫
Manual thermostat

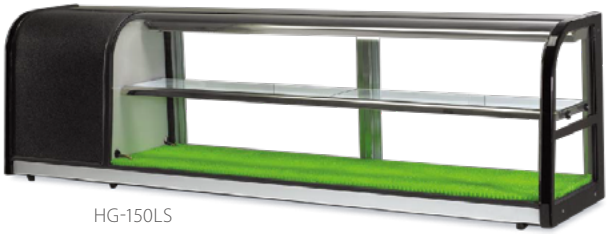

HG-150LS

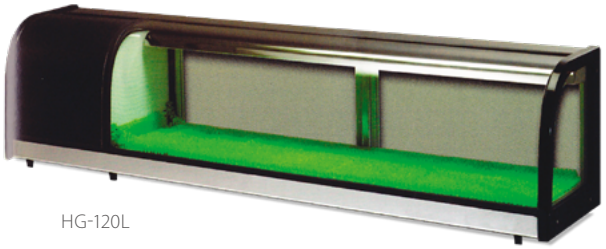

HG-120L

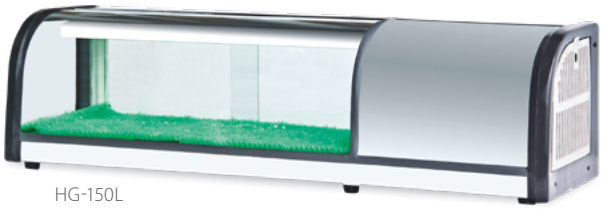


HG-150L


壽司展示櫃 Sushi showcase

型號 Model	尺寸 – 濶 × 深 × 高 Dimensions – W × D × H (mm)	温度範圍 Temperature range (°C)	功率 Power (w)	冷凍系統 Cooling System	製冷劑 *1 Refrigerant	其他 Others
HG-120LS	1200×370×510	+5 ~ +10	250	喉冷 Static	R134a / R290	不銹鋼 Stainless Steel
HG-150LS	1500×370×510	+5 ~ +10	275			
HG-180LS	1800×370×510	+5 ~ +10	350			
HG-120L	1200×350×340	+5 ~ +10	250	喉冷 Static	R134a / R290	不銹鋼 Stainless Steel
HG-150L	1500×350×340	+5 ~ +10	275			
HG-180L	1800×350×340	+5 ~ +10	350			


*1 新舊製冷劑種類由工廠隨機配置。
Refrigerant type is randomly configured by the factory.

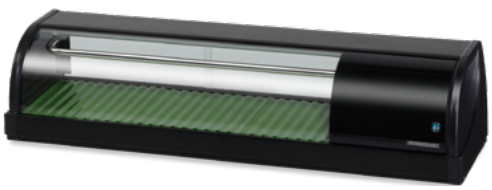


HNC-120BE-LB /HNC-120BE-RB

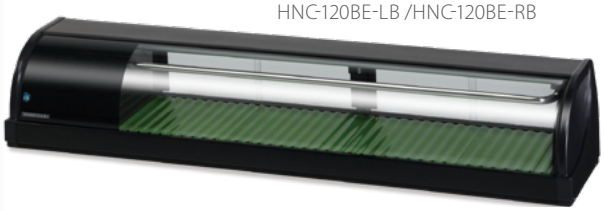

HNC-150BE-LB/ HNC-150BE-RB

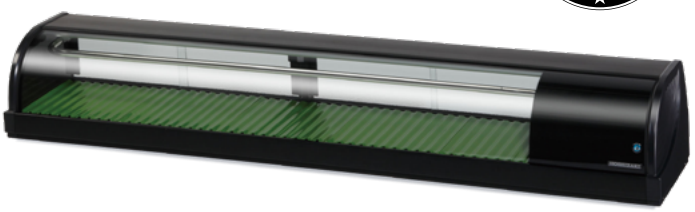

HNC-180BE-LB/ HNC-180BE-RB

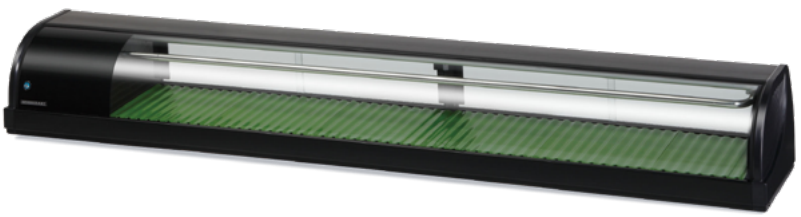

HNC-210BE-LB/ HNC-210BE-RB

日本星崎壽司展示櫃 Hoshizaki Sushi showcase

型號 Model	尺寸 – 濶 × 深 × 高 Dimensions – W × D × H (mm)	温度範圍 Temperature range (°C)	功率 Power (w)	有效容量 Validity Capacity (L)	冷凍系統 Cooling System	製冷劑 Refrigerant
HNC-120BE-LB / HNC-120BE-RB	1200×345×270	+4	150	42	喉冷 Static	R134a
HNC-150BE-LB / HNC-150BE-RB	1500×345×270	+4	150	57		
HNC-180BE-LB / HNC-180BE-RB	1800×345×270	+4	150	72		
HNC-210BE-LB /HNC-210BE-RB	2100×345×270	+4	150	87		

＊ 壽司櫃 : 壓縮機方向以玻璃趟門方向（由廚師的方向）分左右 ; 右邊壓縮機需要訂造。
Compressor is on the left (from chef prospective) as standard. But can be tailor made.

⚠ 請避免陽光直射和遠離熱源，環境温度不能高於 28° C，或有可能影響製冷效果。
Please avoid direct sunlight and heat sources. The ambient temperature cannot be higher than 28° C, which may affect the cooling effect.

產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.



帶鋼吧架工作台 BD-260L2C



不銹鋼四櫃桶工作台 3 月台 97



不銹鋼平台櫃 6 月台 58



不銹鋼沙律工作台 6 月台 82



不銹鋼沙律工作台 8 月台 82



不銹鋼風冷沙律工作台 12 月台 54

訂造不銹鋼工作台 Tailor-Made Stainless Steel Refrigerated Work Table

型號 Model		尺寸 – 濶 × 深 × 高 Dimensions – W × D × H (mm)
BD-260L2C	帶鋼吧架工作台	1500×620×(800+350)
3 月台 97	不銹鋼四櫃桶工作台	1500×760×560
6 月台 58	不銹鋼平台櫃	1397×965×1219
6 月台 82	不銹鋼沙律工作台	1800×700×840
8 月台 82	不銹鋼沙律工作台	1760×(700+400)×800
12 月台 54	不銹鋼風冷沙律工作台	1300×700×800



凍蟹櫃 9 月台 79



+2 ~ +8 ° C
白色 / 黑色

鮮花保鮮櫃 XH088-1



玻璃趟門鮮奶櫃 2 月台 1



四門風冷雙溫雪櫃 11 月台 74

訂造懷舊汽水櫃







W-150 W-200

不銹鋼水冷櫃



掛牆展示櫃 11 月台 2

訂造雪櫃 Tailor-Made Cabinet

型號 Model		尺寸 – 濶 × 深 × 高 Dimensions – W × D × H (mm)
9 月台 79	凍蟹櫃	1067×508×1981
XH088-1	鮮花保鮮櫃	1210×700×1980
2 月台 1	玻璃趟門鮮奶櫃	813×610×1549
11 月台 74	四門風冷雙溫雪櫃	1200×710×1900
W-150	不銹鋼水冷櫃	1000×627×830
W-200	不銹鋼水冷櫃	1200×660×830
11 月台 2	掛牆展示櫃	1300×500×700

產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.

單門風冷冷凍速凍櫃



3 盤



15 盤



凍盤雪櫃 4 月台 52



暗管磁力門冷凍櫃 6 月台 81



淡水魚凍盤櫃殼 9 月台 42



雙門明管凍櫃殼 11 月台 159



不銹鋼風冷低溫櫃 12 月台 7

訂造廚具產品 Tailor-Made Products

型號 Model		尺寸 – 濶 × 深 × 高 Dimensions – W × D × H (mm)
3 盤 / 15 盤	單門風冷冷凍速凍櫃	800×800×2000
4 月台 52	凍盤雪櫃	2870×1143×914
6 月台 81	暗管磁力門冷凍櫃	950×760×1980
9 月台 42	淡水魚凍盤櫃殼	3658×1067×813
11 月台 159	雙門明管凍櫃殼	1829×762×2134
12 月台 7	不銹鋼風冷低溫櫃	1200×455×1105

AOYIXING
澳意星



FG/M1-588LF



FG/M2-988LF



FG/M3-1488LF

澳意星訂造風乾燒鵝櫃 Aoyixing – Tailor-Made Air drying Cabinet

型號 Model	尺寸 – 濶 × 深 × 高 Dimensions – W × D × H (mm)	溫度範圍 Temperature range (°C)	功率 Power (w)
FG/M1-588LF	670 × 680 × 2100	+3 ~ +10	620
FG/M2-988LF	1260 × 680 × 2100	+3 ~ +10	700
FG/M3-1488LF	1860 × 680 × 2100	+3 ~ +10	900

產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.



AZH-60NE



AZH-80NE



AZH-120NE/ AZH-150NE

澳意星製冰機 Aoyixing - Ice Machine

型號 Model	尺寸 – 濶 × 深 × 高 Dimensions – W × D × H	淨重 Net Weight	日產量 Production 24h		功率 Power	儲冰箱容量 Bin Capacity
	(mm)	(kg)	(kg)	(lb)	(w)	(kg)
AZH-60NE	448×400×795	28	68	150	240	18
AZH-80NE	448×400×798	30	90	198	300	18
AZH-120NE	556×435×907	35	130	287	400	40
AZH-150NE	556×435×907	37	160	353	520	40



AZK-60NE



AZK-70NE



AZK-90NE



AZK-120NE



AZK-150NE


澳意星藍光殺菌製冰機 Aoyixing - UV Ice machine

型號 Model	尺寸 – 濶 × 深 × 高 Dimensions – W × D × H	淨重 Net Weight	日產量 Production 24h		功率 Power	儲冰箱容量 Bin Capacity
	(mm)	(kg)	(kg)	(lb)	(w)	(kg)
AZK-60NE	450×405×750	25	75	165	245	18
AZK-70NE	450×510×830	36	85	187	275	18
AZK-90NE	515×570×785	33	110	243	380	15
AZK-120NE	680×680×915	44	140	309	375	45
AZK-150NE	680×680×930	45	180	375	500	45

＊ 製冰機應使用符合飲用水標準的水源，並安裝過濾器。
The ice machine should use a water source that meets drinking water standards and install a filter.
＊ 上述日產量在環境溫度低於 20°C 及 入水溫度低於 15°C 下測量所得。
Ambient temp. +20°C; Water temp. +15°C.

產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.

冰粒厚度自由調節
Ice maker adjustment of the Ice cube thickness





空心冰粒



中空冰粒



實心冰粒

- 弧形斜面箱蓋設計
  Curved inclined box cover design
- 藍光消毒
  Blue light disinfection
- 預約製冰時間，提前製冰
  Reserve time and make ice in advance
- 一鍵清洗
  One-click cleaning
- 自動排污水
  Automatic sewage discharge



AZK-160FNE



AZK-180FNE



AZK-260FNE



一體成型發泡技術
5-7 小時有效保溫，隔絕外面溫度。

澳意星組合式製冰機 Aoyixing - Modular Ice Machine


型號 Model	尺寸 – 濶 × 深 × 高 Dimensions – W × D × H	淨重 Net Weight	日產量 Production 24h		功率 Power	儲冰箱容量 Bin Capacity
	(mm)	(kg)	(kg)	(lb)	(w)	(kg)
AZK-160FNE	580×830×1570	73	280	617	510	120
AZK-180FNE	580×830×1570	74	360	794	855	120
AZK-260FNE	580×830×1645	82	520	1146	945	120

＊ 製冰機應使用符合飲用水標準的水源，並安裝過濾器。
The ice machine should use a water source that meets drinking water standards and install a filter.

＊ 上述日產量在環境溫度低於 20°C 及 入水溫度低於 15°C 下測量所得。
Ambient temp. +20°C; Water temp. +15°C.

產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.

方型粒冰
Ice Cube

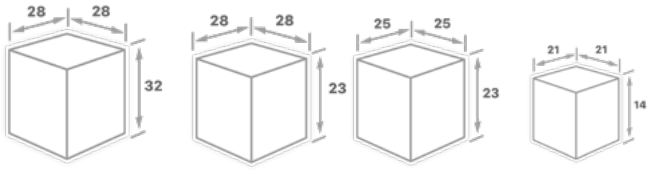

(mm)

大
Large
(22g)
✱

中 / 大
MEDIUM/LARGE
(17G)
✱-23

中
MEDIUM
(13G)
✱-25

小
SMALL
(6G)
✱-21

✱= 型號 Model No;
數字代表冰粒大小
The number represents the size of ice



IM-30CA
IM-30CA-25



IM-45CA
IM-45CA-25



IM-65A
IM-65A-25



IM-100A
IM-100A-23
IM-130A
IM-130A -23

星崎一體式製冰機 Hoshizaki Self-contained Ice Machine

型號 Model	日產量 * Production 24h *		尺寸 – 濶 × 深 × 高 Dimensions – W ×D×H	功率 Power	儲冰箱容量 Bin Capacity	
	(kg)	(lb)	(mm)	(w)	(kg)	(lb)
IM-30CA	30	66	398×510×(827~847)	250	12	25
IM-30CA-25	30	66				
IM-45CA	47	104	660×570×(827~847)	310	15	35
IM-45CA-25	48	106				
IM-65A	70	154	660×570×(932~952)	390	26	60
IM-65A-25	59	130				
IM-100A	112	247	660×570×(1332~1352)	550	52	115
IM-100A-23	96	212				
IM-130A	126	278	660×570×(1332~1352)	630	52	115
IM-130A-23	106	234				

星崎組合式製冰機 Hoshizaki Modular Ice Machine

型號 Model	日產量 * Production 24h *		尺寸 – 濶 × 深 × 高 Dimensions – W ×D×H	功率 Power	儲冰箱容量 Bin Capacity	
	(kg)	(lb)	(mm)	(w)	(kg)	(lb)
IM-220AA	220	485	560×639×775 (w/o Bin) 560×820×1886 (w/B-301SA)	950	視儲冰箱型號而定 Fittable for different bin	
IM-220AA-23	185	408				
IM-220AA-21	185	408				
IM-220AWA*	220	485		870		
IM-220-AWA-21*	220	485				
B-301SA (儲冰箱)	–	–	559×820×(1016+90)	–	144	315
B-501SA (儲冰箱)	–	–	765×820×(1016+90)	–	217	480
B-801SA (儲冰箱)	–	–	1220×820×(1016+90)	–	348	770



IM220AA
IM220AA-23
IM220AA-21
IM-220AWA
IM-220AWA-21

✳ 帶有“W”的型號 = 水冷冷凝系統。
Model number with "W"=Water Cooled Condensing System.


✳ 上述日產量在環境溫度低於 10°C 及 入水溫度低於 10°C 下測量所得。
Ambient temp. +10°C; Water temp. +10°C.

✳ 製冰機應使用符合飲用水標準的水源，並安裝過濾器。
The ice machine should use a water source that meets drinking water standards and install a filter.

✳ 電源：單相 /220V/50Hz
Power Supply: Single-phase/ 220V/ 50Hz

產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.

方型粒冰
Ice Cube



大
Large
(22g) ✱

中 / 大
MEDIUM/LARGE
(17G) ✱-23

中
MEDIUM
(13G)✱-25

小
SMALL
(6G) ✱-21

(mm)

✱= 型號 Model No;
數字代表冰粒大小
The number represents
the size of ice



IM-100CNE
IM-100CNE-23



組合式製冰機
IM-240ANE
IM240ANE-23



IM-30CNE
IM-30CNE-25



IM-45NE
IM-45NE-25



IM-45CNE
IM-45CNE-25



IM-65NE
IM-65NE-25



IM-100NE /IM-100NE-23
IM-130NE/IM-130NE-23



IM-240NE
IM-240NE-23

星崎一體式製冰機 Hoshizaki Self-contained Ice Machine

型號 Model	日產量 * Production 24h *		尺寸 – 濶 × 深 × 高 Dimensions – W × D × H	功率 Power	儲冰箱容量 Bin Capacity	
	(kg)	(lb)	(mm)	(w)	(kg)	(lb)
IM-30CNE	28	62	398×451×(787~797)	270	11.5	25
IM-30CNE-25	24	53				
IM-45NE	44	97	503×456×(930~940)	330	18	40
IM-45NE-25	39	85				
IM-45CNE	44	97	633×511×(780~790)	320 / 330	15	33
IM-45CNE-25	39	85				
IM-65NE	63	139	633×506×(930~940)	400	26	57
IM-65NE-25	56	123				
IM-100CNE	95	209	1004×600×(800~810)	630	38	84
IM-100CNE-23	79	174				
IM-100NE	95	209	704×506×(1290~1300)	630	50	110
IM-100NE-23	79	174				
IM-130NE	120	265	704×506×(1290~1300)	700	50	110
IM-130NE-23	100	220				
IM-240NE	240	529	704×665×(1600~1610)	1320	110	243
IM-240NE-23	225	496				

星崎組合式製冰機 Hoshizaki Modular Ice Machine

型號 Model	日產量 * Production 24h *		尺寸 – 濶 × 深 × 高 Dimensions – W × D × H	功率 Power	儲冰箱容量 Bin Capacity	
	(kg)	(lb)	(mm)	(w)	(kg)	(lb)
IM-240ANE	240	529	560×700×880 560×820×1991(w/B-301SA)	1320	視儲冰箱型號而定 Fittable for different bin	
IM-240ANE-30	225	496				

方粒冰
Cubelet Ice

星崎桌上型製冰機 Hoshizaki Cubelt Ice Dispenser

型號 Model	日產量 * Production 24h *		尺寸 – 濶 × 深 × 高 Dimensions – W × D × H	功率 Power	儲冰箱容量 Bin Capacity		冰的類型 Shape of Ice
	(kg)	(lb)	(mm)	(w)	(kg)	(lb)	
DCM-60KE	60	132	350×585×(645+50)	320	1.9	4	方粒冰 Cubelet
DCM-120KE	125	275	350×585×(765+50)	480	4	9	



DCM-60KE



DCM-120KE

✳ 上述日產量在環境溫度低於 10°C 及 入水溫度低於 10°C 下測量所得。
Ambient temp. +10°C; Water temp. +10°C.

✳ 製冰機應使用符合飲用水標準的水源，並安裝過濾器。
The ice machine should use a water source that meets drinking water standards and install a filter.

✳ 電源：單相 /220V/50Hz
Power Supply: Single-phase/ 220V/ 50Hz

產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.

新月型粒冰
Crescent Ice

新功能 - 可選和可定制

- 全自動清洗 with Fully Automatic Chemical Cleaning
- UV-LED 消毒（選項）UV-LED Sanitizing (Optional)
- 操作面板（7 段顯示 - 運行狀態和錯誤顯示）
  Operation panel (7-segment display-Operating status & error display)

■ 操作面板 Operation panel





KM-40C


KM-60C


KM-80C


KM-130C



(mm)

星崎一體式製冰機 Hoshizaki Self-contained Ice Machine

型號 Model	日產量 * Production 24h *		尺寸 – 濶 × 深 × 高 + 脚 Dimensions – W × D × H + leg	功率 Power	儲冰箱容量 Bin Capacity	
	(kg)	(lb)	(mm)	(w)	(kg)	(lb)
KM-40C	43	95	452×610×(988 ~ 1008)	250	16	35
KM-60C	60	132	605×610×(988 ~ 1008)	305	23	50
KM-80C	80	176	605×712×(988 ~ 1008)	405	34	85
KM-130C	130	287	630×719×(1333 ~ 1353)	593	55	100

■ 新月形冰粒
Crescent ice cube

■ 減少用水與能源消耗
Reduce water and energy consumption

■ 雙面製冰技術令產量倍增
The unique two-faced ice-making method increases efficiency


KMD-201AB
KMD-201AWB


KMD-270AB
KMD-270AWB


KM-470AJ


KM-590DJ

星崎組合式製冰機 Hoshizaki Modular Ice Machine

型號 Model	日產量 * Production 24h *		尺寸 – 濶 × 深 × 高 Dimensions – W × D × H	功率 Power	儲冰箱容量 Bin Capacity	
	(kg)	(lb)	(mm)	(w)	(kg)	(lb)
KMD-201AB	200	441	560×625×610 (w/o Bin) 560×820×1721 (w/B-301SA)	663	視儲冰箱型號而定 Fittable for different bin	
KMD-201AWB*	190	419		604		
KMD-270AB	275	606		984		
KMD-270AWB*	270	595		925		
KM-470AJ	495	1090	762×695×825 (w/o Bin) 762×820×1931 (w/B-501SA)	1850	視儲冰箱型號而定 Fittable for different bin	
KM-470AWJ*	495	1090		1523		
KM-590DJ	630	1390	1219×695×695 (w/o Bin) 1220×820×1801(w/B-801SA)	2080		
KM-590DWJ*	650	1433		1741		
B-301SA (儲冰箱)	–	–	559×820×(1016+90)	–	144	315
B-501SA (儲冰箱)	–	–	762×820×(1016+90)	–	217	480
B-801SA (儲冰箱)	–	–	1220×820×(1016+90)	–	348	770


B-301SA


B-501SA


B-801SA

＊ 上述日產量在環境溫度低於 10°C 及入水溫度低於 10°C 下測量所得。
Ambient temp. +10°C; Water temp. +10°C.

＊ 電源：單相 /220V/50Hz
Power Supply: Single-phase/ 220V/ 50Hz

＊ 帶有“W”的型號 = 水冷冷凝系統。
Model number with "W"=Water Cooled Condensing System.

＊ 製冰機應使用符合飲用水標準的水源，並安裝過濾器。
The ice machine should use a water source that meets drinking water standards and install a filter.


產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.

粒冰 Ice Cube

■ 座枱式粒冰水機
Cube ice with chilled water dispenser



FRM 35



■ 杯形冰粒，晶瑩剔透
Crystalline and compact. Cools, but the flavour stays the same

■ 成形後會一粒一粒跌落儲雪箱
Suitable for any shape of glass, a cool boost for drinks.



SL35　SL 50　SL 70

■ 自助粒冰機
Self-served cube ice machine



D 90



SL 90　SL 180　SL 260



SL 350

雪花 Frozen Snow

■ 冰呈碎片狀，適合快速冷凍，方便儲存和運送
Ice in granular flakes. Rapid cooling action. Weight and volume tailored to storage, transport and dosing needs.



SLF130



SLF 190



SLF 320

意大利 NTF 一體式製冰機
NTF Self-contained Ice Machine

MADE IN ITALY
意大利製造

型號 Model	日產量 * Production 24h *		尺寸 – 濶 × 深 × 高 Dimensions – W × D × H	功率 Power	儲冰箱容量 Bin Capacity	
	(kg)	(lb)	(mm)	(w)	(kg)	(lb)
FRM35	22	48	540×430×440	320	4	9
D90	22	48	500×630×920	450	12	26
SL35	22	48	355×404×595	320	4	9
SL50	28	62	387×465×612	290	6	13
SL70	37	82	497×592×(802 ~ 837)	370	16	35
SL90	46	102	497×592×(912 ~ 947)	450	25	55
SL180	88	195	735×603×(1022 ~ 1057)	800	40	88
SL260	100	220	735×603×(1122 ~ 1157)	850	60	132
SL350	155	340	840×740×(1190 ~ 1225)	1,400	65	145
SLF130	60	132	450×620×685	420	10	22
SLF190	95	210	496×660×(795 ~ 835)	550	19	42
SLF320	155	340	741×678×(1035 ~ 1075)	650	38	85

* 製冰機應使用符合飲用水標準的水源，並安裝過濾器。
The ice machine should use a water source that meets drinking water standards and install a filter.
* 上述日產量在環境溫度低於 20°C 及 入水溫度低於 15°C 下測量所得。
Ambient temp. +20°C; Water temp. +15°C.

產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.

粒冰 Ice Cube



■ 冰粒呈梯形，生產快速
Truncated pyramid format

■ 成形後會一粒一粒跌落儲雪箱
Quick to produce, with rapid cooling action.


CV305


CV475


CV950


CV1650

雪花 Frozen Snow

■ 冰呈碎片狀，適合快速冷凍，方便儲存和運送
Ice in granular flakes. Rapid cooling action. Weight and volume tailored to storage, transport and dosing needs.


GM360


GM600 / GM1200

儲冰箱 Storage Bin


D30

■ 自助出冰機
Ice Dispenser


T250


PE530


T420 / T830

型號 Model	日產量 * Production 24h*		尺寸 – 濶 × 深 × 高 Dimensions – W × D × H	功率 Power	儲冰箱容量 Bin Capacity		
	(kg)	(lb)	(mm)	(w)	(kg)	(lb)	
CV305	140	310	540×544×747	1,400	視儲冰箱型號而定 Fittable for different bin		
CV475	200	440	770×550×805	1,600			
CV950	400	880	770×550×805	3,000			
CV1650	770	1700	1250×645×950	4,300			
GM360	160	352	560×569×600	650	視儲冰箱型號而定 Fittable for different bin		
GM600	280	620	560×569×695	1,050			
GM1200	510	1120	560×569×695	1,700			
D30 (自助出冰機)	–	–	568×799×817	240	21	46	✓CV 305
Bin T250 (儲冰箱)	–	–	560×815×(1100 ~ 1160)	–	100	220	✓CV 305, GM 360-600-1200 & MGT 310-560-900
Bin PE530 (儲冰箱)	–	–	942×795×(1153 ~ 1213)	–	190	419	✓CV 305-475-950, GM 360-600-1200 & MGT 310-560-900
Bin T420 (儲冰箱)	–	–	870×790×(1100 ~ 1160)	–	200	440	
Bin T830 (儲冰箱)	–	–	1250×790×(1100 ~ 1160)	–	350	770	✓CV 1650

意大利 NTF 組合式製冰機
NTF Modular Ice Machine

MADE IN ITALY 意大利製造

產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.

＊ 上述日產量在環境溫度低於 20°C 及 入水溫度低於 15°C 下測量所得。
Ambient temp. +20°C; Water temp. +15°C.

BREMA Ice Makers

MADE IN ITALY
意大利製造


CB184


CB246


CB316

粒冰 Ice Cube

■ 杯形冰粒，晶瑩剔透。
Crystalline and compact. Cools, but the flavour stays the same.

■ 成形後會一粒一粒跌落儲雪箱。
Suitable for any shape of glass, a cool boost for drinks.


CB416


CB1265


CB1565

意大利 BREMA 製冰機 BREMA Ice Machine

型號 Model	日產量 * Production 24h *		尺寸 – 濶 × 深 × 高 Dimensions – W × D × H	功率 Power	儲冰箱容量 Bin Capacity	
	(kg)	(lb)	(mm)	(w)	(kg)	(lb)
CB184	22	49	355×404×590	320	4	9
CB246	26	57	390×460×615	350	6	13
CB316	35	77	500×580×690	370	16	35
CB416	44	97	500×580×690	450	16	35
CB425	47	104	500×580×800	500	25	55
CB640	67	148	738×600×920	650	40	88
CB840	85	187	738×600×920	800	40	88
CB955	95	209	738×600×1020	850	55	121
CB1265	130	287	840×740×1075	1050	65	143
CB1565	155	342	840×740×1075	1400	65	143

雪花 Frozen Snow

■ 冰呈碎片狀，適合快速冷凍，方便儲存和運送。
Ice in granular flakes. Rapid cooling action. Weight and volume tailored to storage, transport and dosing needs.


GB902


GB1540

型號 Model	日產量 * Production 24h *		尺寸 – 濶 × 深 × 高 Dimensions – W × D × H	功率 Power	儲冰箱容量 Bin Capacity	
	(kg)	(lb)	(mm)	(w)	(kg)	(lb)
GB902	95	209	500×660×690	550	20	44
GB1540	155	345	738×690×920	650	40	88

＊ 上述日產量在環境溫度低於 21°C 及入水溫度低於 15°C 下測量所得。
Ambient temp. +21°C; Water temp. +15°C.

產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.

Ice-O-Matic

U.S.A IMPORTED
美國進口



ICEU225FA



CIM0435HA

儲冰箱 Bin



B40



B55

美國 Ice-O-Matic 製冰機　Ice-O-Matic Ice Machine

	型號 Model	儲冰箱 Bin	儲冰箱容量 Bin Capacity		日產量 * Production 24h *		尺寸 – 濶 × 深 × 高 Dimensions – W × D × H	功率 Power
			(kg)	(lb)	(kg)	(lb)	(mm)	(w)
全粒冰	ICEU225FA	內置冰箱 Self-contain	32	70	90	200	623×667×991	680
半粒冰	CIM0435HA	B40	156	344	182	400	768×787×1493	1470
		B55	230	510			768×787×1810	

＊ 製冰機應使用符合飲用水標準的水源，並安裝過濾器。
The ice machine should use a water source that meets drinking water standards and install a filter.

產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.



台灣生產蒸發器




標準冷庫房板的牆身、天花內外層均為0.7 mm厚壓花紋鋁片夾層。地板內層為1.5 mm厚鍍鋅鋼板，能加強底部承托力。另外冷庫外層可加裝全不鏽鋼板，清理容易，令冷庫表面更光潔、耐用。

標準冷庫由多件規劃房板結構組合、拼接而成。優質房板採用聚安基甲酸乙酯泡沫絕緣材料（Urethane Foam）以高密度黏合而成。房板周邊採用矽膠墊料密封縫位，防止日久漏冷，亦可防患外水浸透。冷庫門框及門板結構均與房板相同，門邊裝有防潮發熱線及磁力膠邊，防止框邊結冰及漏冷。


油壓式自動關門器及重型堅固門鉸配以安全拉手裝置。房內設有低溫照明及空氣活門，確保操作過程安全可靠。

冷庫在0 °C以下使用，並配有衝壓裝置，冷庫門在開關同時可除霜，亦可平衡氣壓之差異。

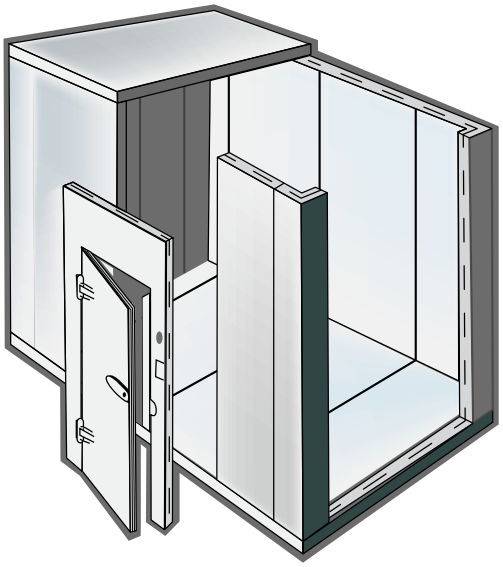


小型冷庫：製冷機組可放庫房頂部。
大型冷庫：製冷機組可分體安裝。
亦可隨時遷拆移位，組裝重用快捷方便。

不同溫度之板厚選擇	
房板平均密度	38-40 kg/m^3
壓力	1 ~ 6 kg/cm^2
操作溫度	0°C ~ 60°C
最低至	0°C ~ 120°C

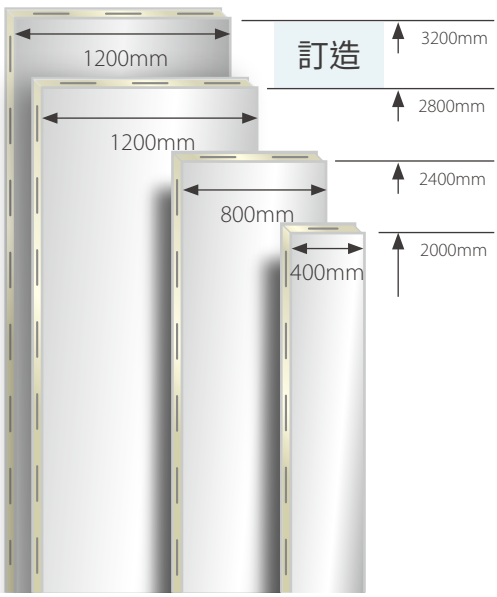

房板厚度

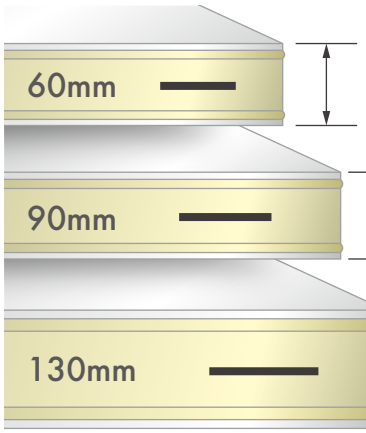

適用於中溫度（0°C）

適用於低溫（-30°C）

適用於特低溫（-40°C）









產品不斷改良，如有更改，均以實物為準。
Products are subject to change due to enhancements and continuous development.




急凍肉

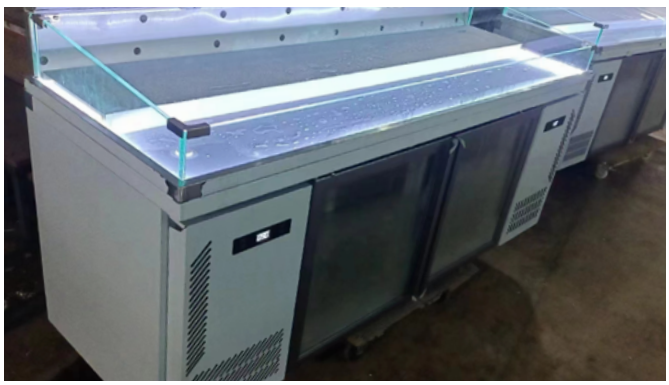

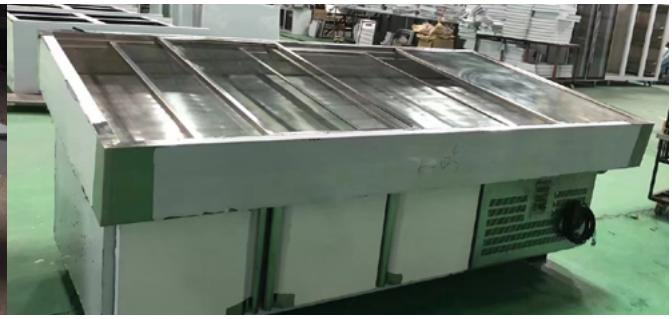

聯品企業集團有限公司
(852) 2718 1817
info@luenpun.com.hk
www.luenpun.com.hk



LP-R24.0001